

MODEL: 20ACH6012 5 TON PORTABLE HEAT PUMP

COOLING CAPACITY HEATING CAPACITY

VOLTAGE AMPS WATTS IN RUSH AMPS EER

COMPRESSOR TYPE COMPRESSOR MOTOR COMPRESSOR RLA COMPRESSOR LRA

EVAPORATOR BLOWER

EVAP CFM - HIGH EVAP MOTOR HP

CONDENSER BLOWER COND CFM

POWER CORD PLUG TYPE CORD LENGTH

COND MOTOR HP

CONDENSATE REMOVAL

LIFT-VERTICAL

REFRIGERANT CHARGE

HEIGHT W/ CASTERS HEIGHT W/O CASTERS WIDTH DEPTH (with 2-inch Kick Plate)

NET WEIGHT

60,100 BTUH 53,500 BTUH

208-230 V, 60 Hz, Single Phase 32 A 6000 W 178 A

178 A 10.0

SCROLL 5 HP 27.6 A 158 A

> CENTRIFUGAL 1950

1950 1 HP

CENTRIFUGAL

2200 1 HP 8/3 6-50P

PUMP - AUTOMATIC

20 FT

10 FT

80 OZ., R-410A

51-3/4 in 45-1/2 in 27-1/2 in 39-1/2 in

485 lb.

TECHNICAL SPECIFICATIONS





WARRANTY

ALL OCEANAIRE PRODUCTS ARE COVERED BY THE OCEANAIRE LIMITED WARRANTY

1 YEAR ON THE FULL PRODUCT PLUS, 4 ADDITIONAL YEARS FOR THE COMPRESSOR (RESTRICTIONS APPLY)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA Cooling Capacity is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA Heating Capacity is total BTUH at 70°DB/60°WB indoor, 47°DB/43°WB Outdoor
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into another area
- OA CFM with free discharge
- Amps & Watts at 208 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°

HEATING AMBIENT OPERATING RANGE 40° TO 85°

NOT APPROVED FOR OUTDOOR USE










TECHNICAL SPECIFICATIONS

MODEL: 20ACH6012 5 TON PORTABLE HEAT PUMP

FEATURES:

- OA SOLID STATE ELECTRONIC CONTROLLER WITH AUTOMATIC MODE CHANGEOVER
- AUTOMATIC 6-SPEED FAN CONTROL WITH MANUAL OVERRIDE
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKS AT FRONT
- OA INTERNAL CONDENSATE PUMP WITH OVERFLOW ALERT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTERS

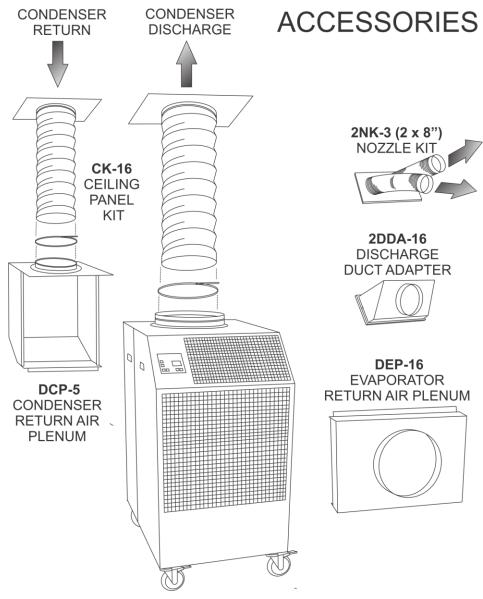

NOTE: 20ACH60-MODELS SHIP WITH 16-INCH FLANGE



