

OCEANAIRE

MODEL: 2OACH6034
5 TON PORTABLE HEAT PUMP

TECHNICAL SPECIFICATIONS

COOLING CAPACITY	60,100 BTUH
HEATING CAPACITY	53,500 BTUH
VOLTAGE	460 V, 60 Hz, Three Phase
AMPS	14.8 A
WATTS	6000 W
IN RUSH AMPS	87 A
EER	10.0
COMPRESSOR TYPE	SCROLL
COMPRESSOR MOTOR	5 HP
COMPRESSOR RLA	9 A
COMPRESSOR LRA	62 A
EVAPORATOR BLOWER	CENTRIFUGAL
EVAP CFM - HIGH	1950
EVAP MOTOR HP	1 HP
CONDENSER BLOWER	CENTRIFUGAL
COND CFM	2200
COND MOTOR HP	1 HP
POWER CORD	10/4
PLUG TYPE	L16-20P
CORD LENGTH	10 FT
CONDENSATE REMOVAL	PUMP - AUTOMATIC
LIFT-VERTICAL	20 FT
REFRIGERANT CHARGE	80 OZ., R-410A
HEIGHT W/ CASTERS	51-3/4 in
HEIGHT W/O CASTERS	45-1/2 in
WIDTH	27-1/2 in
DEPTH (with 2-inch Kick Plate)	39-1/2 in
NET WEIGHT	520 lb.



HEATING & COOLING



WARRANTY

ALL OCEANAIRE PRODUCTS ARE COVERED BY THE OCEANAIRE LIMITED WARRANTY

1 YEAR ON THE FULL PRODUCT
PLUS, 4 ADDITIONAL YEARS FOR THE COMPRESSOR
(RESTRICTIONS APPLY)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA **Heating Capacity** is total BTUH at 70°DB/60°WB indoor, 47°DB/43°WB Outdoor
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into another area
- OA CFM with free discharge
- OA Amps & Watts at 460 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°

HEATING AMBIENT OPERATING RANGE 40° TO 85°

NOT APPROVED FOR OUTDOOR USE



OA-TS-2OACH6034-07262018


OCEANAIRE
OCEANAIRE-INC.COM



MODEL: 2OACH6034
5 TON PORTABLE HEAT PUMP

FEATURES:

- OA SOLID STATE ELECTRONIC CONTROLLER WITH AUTOMATIC MODE CHANGEOVER
- OA AUTOMATIC 6-SPEED FAN CONTROL WITH MANUAL OVERRIDE
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKS AT FRONT
- OA INTERNAL CONDENSATE PUMP WITH OVERFLOW ALERT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTERS
- OA THREE PHASE MONITOR

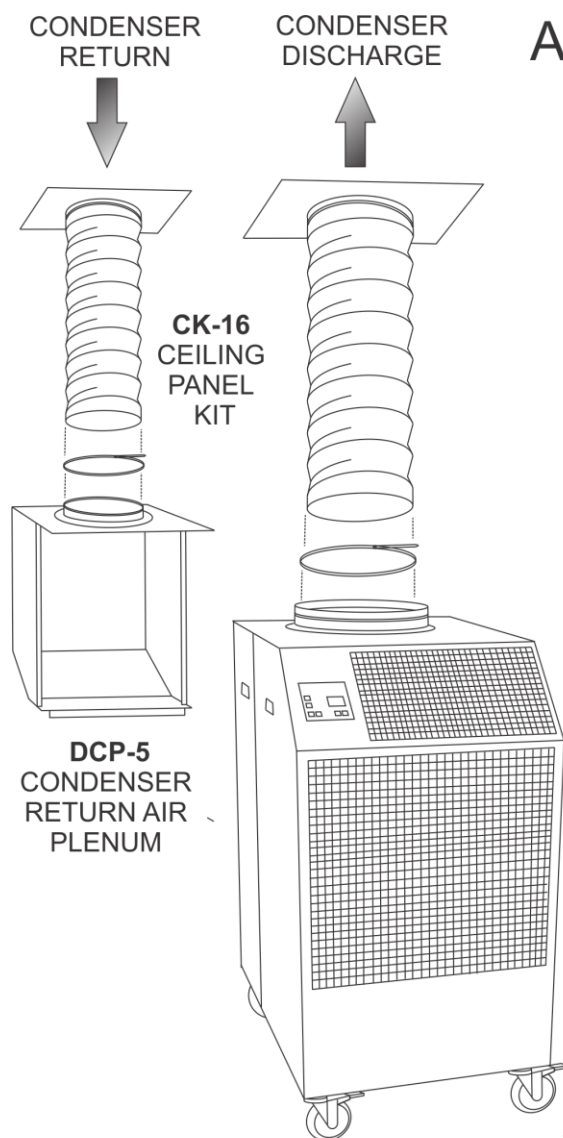

ACCESSORIES



NOTE: 2OACH60-MODELS SHIP WITH 16-INCH FLANGE