

# OCEANAIRE

## MODEL: PAC6012 5 TON SPOT COOLER

## TECHNICAL SPECIFICATIONS



AIR COOLED



## WARRANTY

ALL OCEANAIRE PRODUCTS ARE COVERED BY THE OCEANAIRE LIMITED WARRANTY

1 YEAR ON THE FULL PRODUCT  
PLUS, 4 ADDITIONAL YEARS FOR THE COMPRESSOR  
(RESTRICTIONS APPLY)

|                                       |                                |
|---------------------------------------|--------------------------------|
| <b>COOLING CAPACITY</b>               | <b>60,100 BTUH</b>             |
| VOLTAGE                               | 208-230 V, 60 Hz, Single Phase |
| AMPS                                  | 32.0 A                         |
| WATTS                                 | 6000 W                         |
| IN RUSH AMPS                          | 178 A                          |
| EER                                   | 10.0                           |
| COMPRESSOR TYPE                       | SCROLL                         |
| COMPRESSOR MOTOR                      | 5 HP                           |
| COMPRESSOR RLA                        | 27.6 A                         |
| COMPRESSOR LRA                        | 158 A                          |
| EVAPORATOR BLOWER                     | CENTRIFUGAL                    |
| EVAP CFM - HIGH                       | 1950                           |
| EVAP MOTOR HP                         | 1 HP                           |
| CONDENSER BLOWER                      | CENTRIFUGAL                    |
| COND CFM                              | 2200                           |
| COND MOTOR HP                         | 1 HP                           |
| POWER CORD                            | 8/3                            |
| PLUG TYPE                             | 6-50P                          |
| CORD LENGTH                           | 10 FT                          |
| CONDENSATE REMOVAL<br>LIFT - VERTICAL | PUMP - AUTOMATIC<br>20 FT      |
| REFRIGERANT CHARGE                    | 80 OZ., R-410A                 |
| HEIGHT W/ CASTERS                     | 51-3/4 in                      |
| HEIGHT W/O CASTERS                    | 45-1/2 in                      |
| WIDTH                                 | 27-1/2 in                      |
| DEPTH (with 2-inch Kick Plate)        | 39-1/2 in                      |
| NET WEIGHT                            | 485 lb.                        |

## SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into another area
- OA CFM with free discharge
- OA Amps & Watts at 208 Volts

**COOLING AMBIENT OPERATING RANGE 65° TO 105°**

**NOT APPROVED FOR OUTDOOR USE**



OA-TS-PAC6012-07262018

OCEANAIRE  
OCEANAIRE-INC.COM




# OCEANAIRE

## TECHNICAL SPECIFICATIONS

**MODEL: PAC6012**  
**5 TON SPOT COOLER**

### FEATURES:

- OA 24 V CONTROL CIRCUIT WITH NON-PROGRAMMABLE ELECTRONIC THERMOSTAT
- OA WASHABLE ELECTROSTATIC AIR FILTER
- OA SWIVEL BALL BEARING CASTERS WITH LOCKS AT FRONT
- OA 2-SPEED FAN SWITCH
- OA INTERNAL CONDENSATE PUMP WITH OVERFLOW ALERT
- OA HIGH PRESSURE SAFETY SWITCH

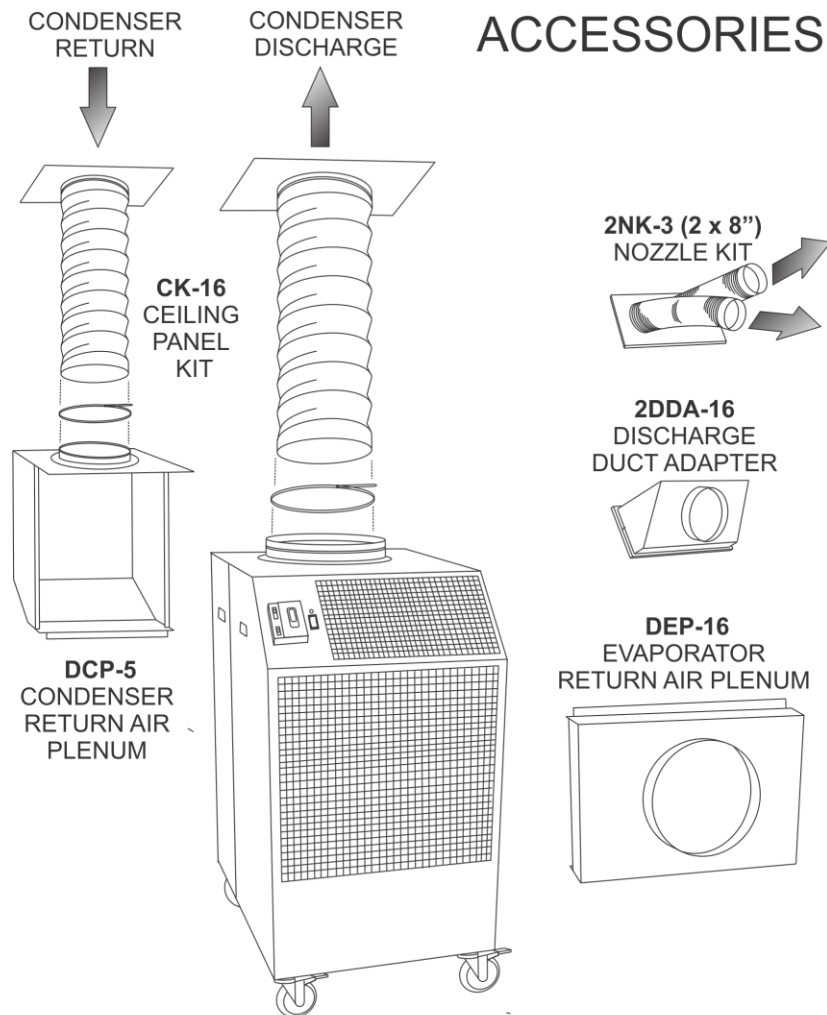

NOTE: PAC60-MODELS SHIP WITH 16-INCH FLANGE

OCEANAIRE  
OCEANAIRE-INC.COM

