

OCEANAIRE

MODEL: 2OAC6012
5 TON DELUXE PORTABLE
AIR CONDITIONER

TECHNICAL SPECIFICATIONS

| | |
|-------------------------|---------------------|
| COOLING CAPACITY | 60,100 BTUH |
| VOLTAGE | 208-230V, 60Hz, 1PH |
| AMPS | 32 |
| TOTAL WATTS | 6000 |
| IN RUSH AMPS | 178 |
| PLUG TYPE | 6-50P |
| EER | 10.0 |
| COMPRESSOR | Scroll |
| COMPRESSOR HP | 5 |
| COMPRESSOR LRA | 158 |
| EVAP CFM - HIGH | 1950 |
| EVAP MOTOR HP | 1 |
| COND CFM | 2200 |
| COND MOTOR HP | 1 |
| CONDENSATE REMOVAL | PUMP – 20 ft. Lift |
| REFRIGERANT CHARGE | 80 oz R-410A |
| HEIGHT | 51-3/4 in |
| WIDTH | 27-1/2 in |
| DEPTH | 39-1/2 in |
| NET WEIGHT | 485 lb |



AIR COOLED



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into separate area
- OA CFM with free discharge
- OA Amps & Watts at 208 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°

NOT APPROVED FOR OUTDOOR USE



Cooling done Right!

OCEANAIRE


OCEANAIRE-INC.COM
OA-TS-2OAC6012-03012020

OCEANAIRE

MODEL: 2OAC6012
5 TON DELUXE PORTABLE
AIR CONDITIONER

PRODUCT FEATURES

- OA SOLID STATE ELECTRONIC CONTROLLER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA INTERNAL CONDENSATE PUMP WITH OVERFLOW ALERT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTERS

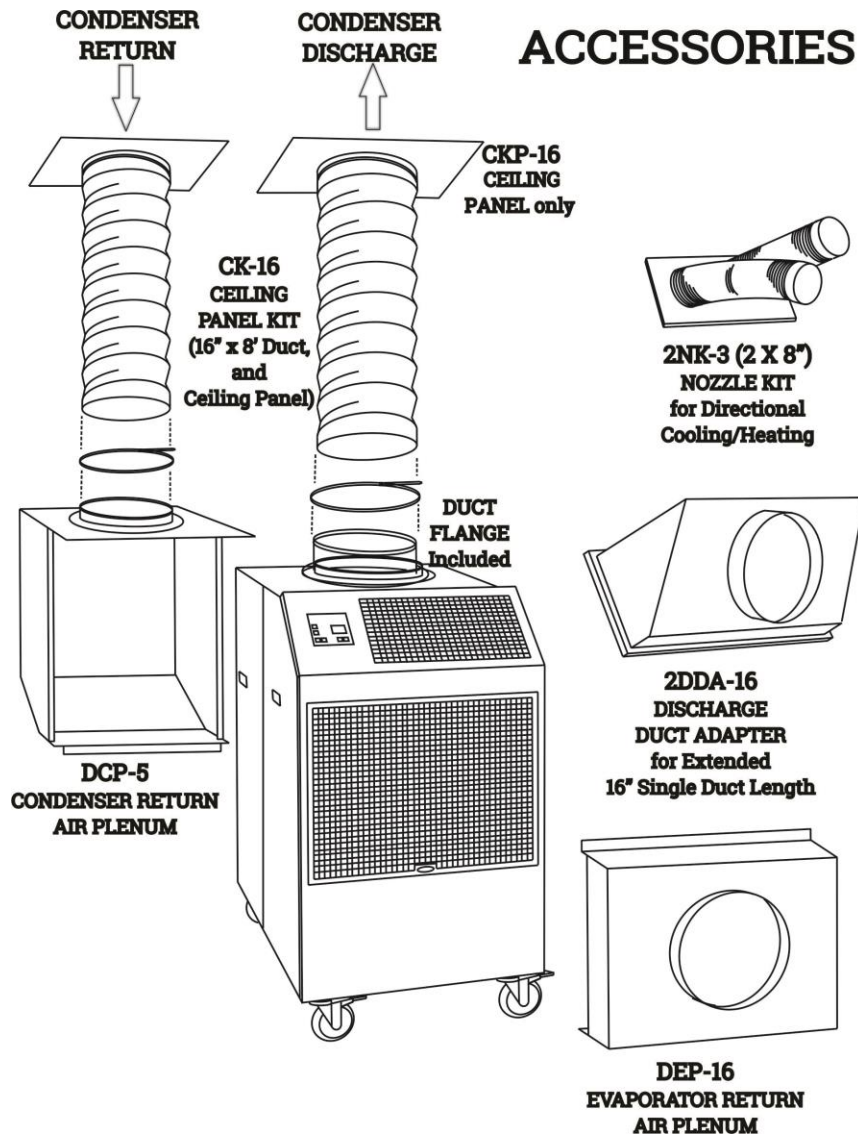

Cooling done Right!

OCEANAIRE

OCEANAIRE-INC.COM
OA-TS-2OAC6012-03012020