

OCEANAIRE

MODEL: 2OACH3612
3 TON PORTABLE HEAT PUMP

TECHNICAL SPECIFICATIONS

COOLING CAPACITY 36,050 BTUH

HEATING CAPACITY 32,500 BTUH

VOLTAGE 208-230V, 60Hz, 1PH

AMPS 19.6

TOTAL WATTS 3620

IN RUSH AMPS 113

PLUG TYPE 6-30P, LCDI

EER 10.0

COMPRESSOR Scroll

COMPRESSOR HP 3

COMPRESSOR LRA 83

EVAP CFM - HIGH 1200

EVAP MOTOR HP 1/3

COND CFM 1390

COND MOTOR HP 1

CONDENSATE TANK 5 GALLON
(Pump Optional)

REFRIGERANT CHARGE 66 oz R-410A

HEIGHT 50-1/4 in

WIDTH 27-1/2 in

DEPTH 35 in

NET WEIGHT 365 lbs



HEATING & COOLING



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ⓘ **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed

ⓘ **Heating Capacity** is total BTUH at 70°DB/60°WB indoor, 47°DB/43°WB Outdoor

ⓘ Dedicated Circuit and Time Delay fuses/circuit breakers are recommended

ⓘ EER is determined at high fan speed, with condenser discharge air ducted into separate area

ⓘ CFM with free discharge

ⓘ Amps & Watts at 208 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°

HEATING AMBIENT OPERATING RANGE 40° TO 85°

NOT APPROVED FOR OUTDOOR USE



Cooling and Heating done Right!

OCEANAIRE

OCEANAIRE-INC.COM


OA-TS-2OACH3612-03012020

OCEANAIRE

MODEL: 2OACH3612
3 TON PORTABLE HEAT PUMP

PRODUCT FEATURES

- OA SOLID STATE ELECTRONIC CONTROLLER
- OA AUTOMATIC MODE CHANGEOVER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA CONDENSATE OVERFLOW ALERT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTERS

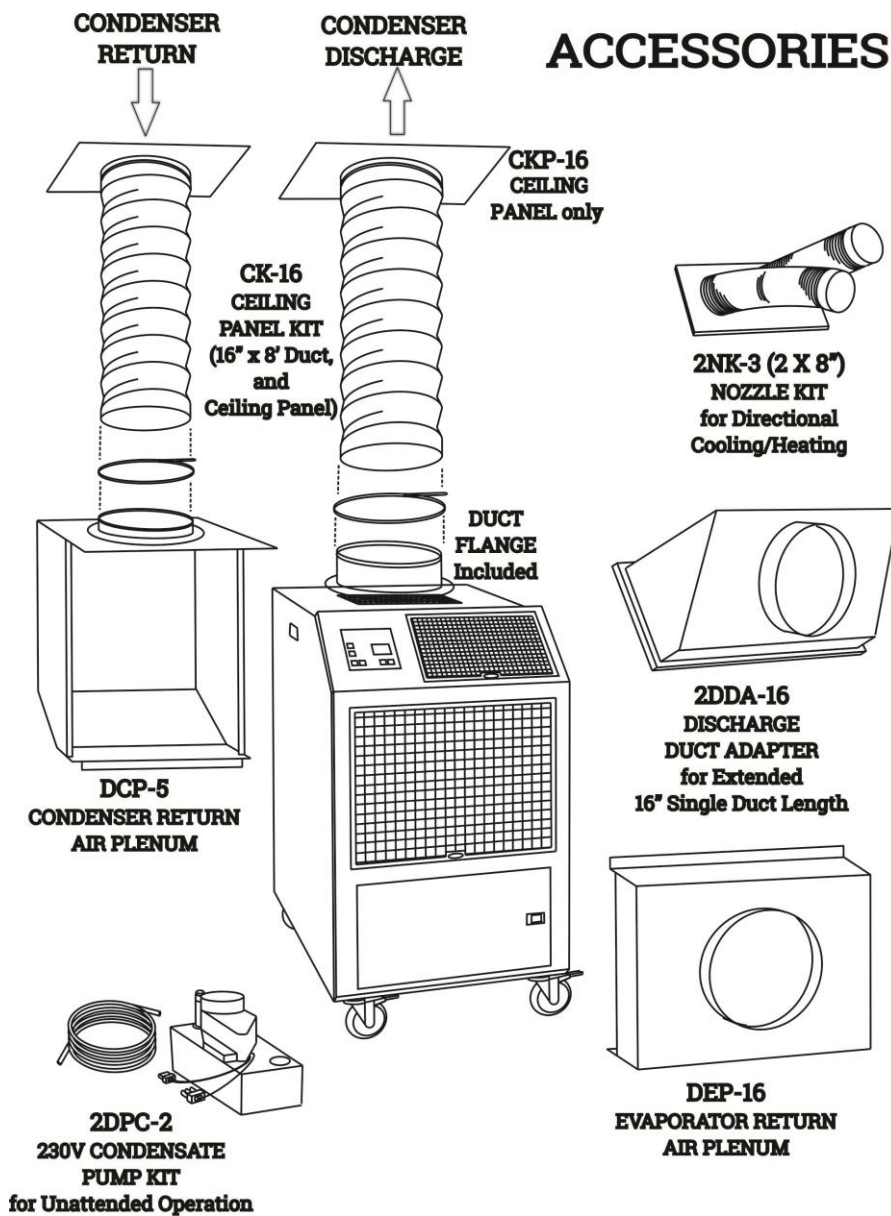

OCEANAIRE

OCEANAIRE-INC.COM
OA-TS-2OACH3612-03012020