

OCEANAIRE

MODEL: 2OACH6034
5 TON PORTABLE HEAT PUMP

TECHNICAL SPECIFICATIONS

COOLING CAPACITY	60,100 BTUH
HEATING CAPACITY	53,500 BTUH
VOLTAGE	460V, 60Hz, 3PH
AMPS	14.8
TOTAL WATTS	6000
IN RUSH AMPS	87
PLUG TYPE	L16-20P
EER	10.0
COMPRESSOR	Scroll
COMPRESSOR HP	5
COMPRESSOR LRA	60
EVAP CFM - HIGH	1950
EVAP MOTOR HP	1
COND CFM	2200
COND MOTOR HP	1
CONDENSATE REMOVAL	PUMP – 20 ft. Lift
REFRIGERANT CHARGE	80 oz R-410A
HEIGHT	51-3/4 in
WIDTH	27-1/2 in
DEPTH	39-1/2 in
NET WEIGHT	520 lbs



HEATING & COOLING



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA **Heating Capacity** is total BTUH at 70°DB/60°WB indoor, 47°DB/43°WB Outdoor
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into separate area
- OA CFM with free discharge
- OA Amps & Watts at 460 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°

HEATING AMBIENT OPERATING RANGE 40° TO 85°

NOT APPROVED FOR OUTDOOR USE



Cooling and Heating done Right!

OCEANAIRE

OCEANAIRE-INC.COM


OA-TS-2OACH6034-03012020

OCEANAIRE


MODEL: 2OACH6034
5 TON PORTABLE HEAT PUMP

PRODUCT FEATURES


- OA SOLID STATE ELECTRONIC CONTROLLER
- OA AUTOMATIC MODE CHANGEOVER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA INTERNAL CONDENSATE PUMP WITH OVERFLOW ALERT
- OA HIGH PRESSURE SAFETY SWITCH
- OA THREE PHASE MONITOR
- OA WASHABLE ELECTROSTATIC AIR FILTERS

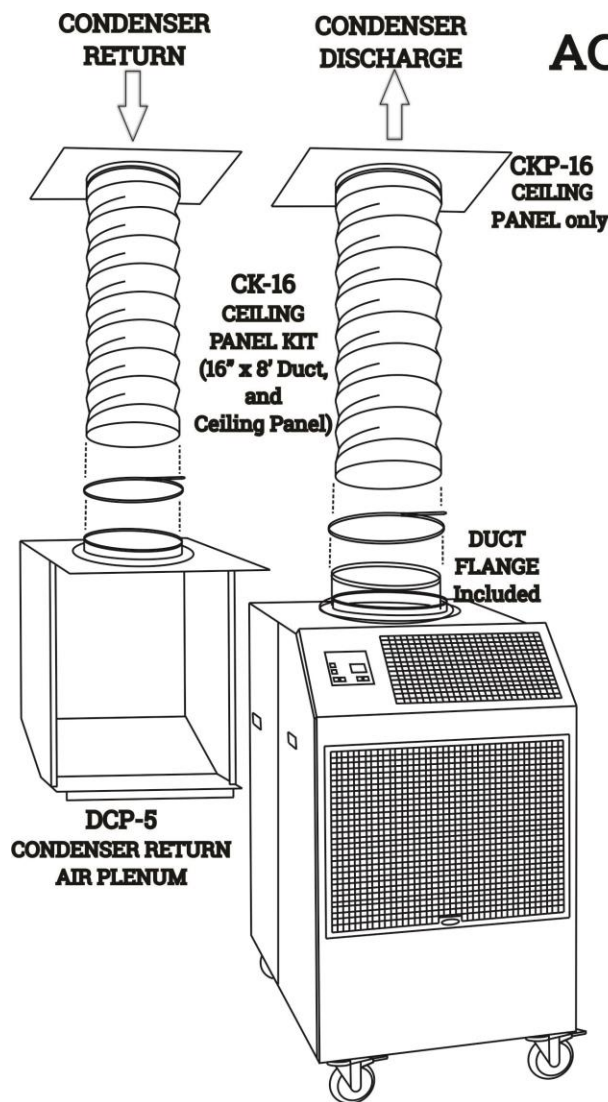


ACCESSORIES



**2NK-3 (2 X 8")
NOZZLE KIT
for Directional
Cooling/Heating**



**2DDA-16
DISCHARGE
DUCT ADAPTER
for Extended
16" Single Duct Length**



**DEP-16
EVAPORATOR RETURN
AIR PLENUM**

OCEANAIRE

OCEANAIRE-INC.COM
OA-TS-2OACH6034-03012020