

OCEANAIRE

MODEL: OWC1211 1 TON DELUXE PORTABLE WATER COOLED AIR CONDITIONER

TECHNICAL SPECIFICATIONS

COOLING CAPACITY	11,800 BTUH
VOLTAGE	115V, 60Hz, 1PH
AMPS	8.1
TOTAL WATTS	930
IN RUSH AMPS	56
PLUG TYPE	5-15P, LCDI
EER	12.9
COMPRESSOR	ROTARY
COMPRESSOR HP	1
COMPRESSOR LRA	50
EVAP CFM - HIGH	400
EVAP MOTOR HP	1/8
COND WATER FLOW (GPM)	
AT 60°F INLET	0.75
AT 85°F INLET	3
WATER VALVE CONNECTION (INLET)	3/8 MF
WATER RETURN CONNECTION	3/8 MF
CONDENSATE REMOVAL	PUMP AUTOMATIC
20' VERTICAL LIFT	3/8 MF
REFRIGERANT CHARGE	18 oz R-410A
HEIGHT	33-3/4 in
WIDTH	20-1/8 in
DEPTH	13-1/8 in
NET WEIGHT	125 lb



WATER COOLED



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air with 85°EWT and 105°LWT
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed
- OA CFM with free discharge
- OA Amps & Watts at 115 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°
NOT APPROVED FOR OUTDOOR USE



Cooling done Right!
OCEANAIRE

OCEANAIRE-INC.COM
OA-TS-OWC1211-03012020

OCEANAIRE


MODEL: OWC1211
1 TON DELUXE PORTABLE
WATER COOLED AIR CONDITIONER

PRODUCT FEATURES

- OA SOLID STATE ELECTRONIC CONTROLLER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA INTERNAL CONDENSATE PUMP WITH OVERFLOW ALERT
- OA WATER REGULATING VALVE
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTER



ACCESSORIES

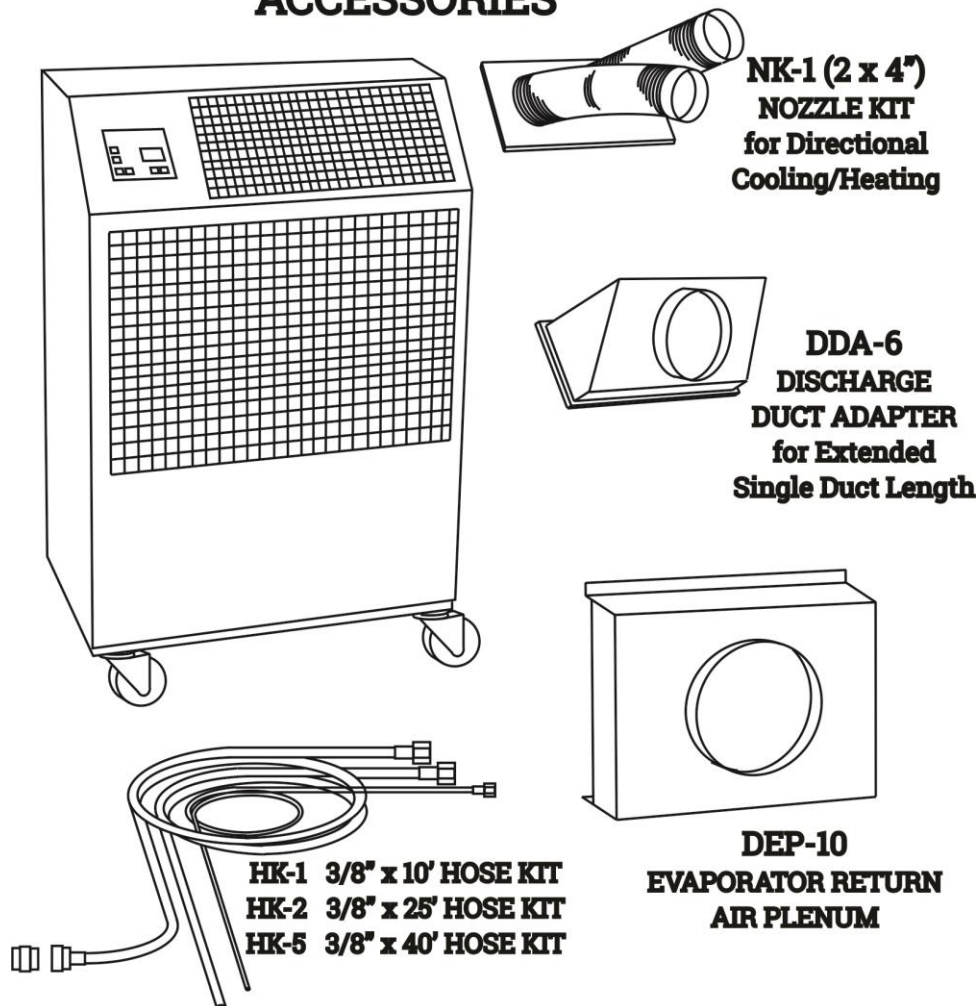

NK-1 (2 x 4")
NOZZLE KIT
for Directional
Cooling/Heating

DDA-6
DISCHARGE
DUCT ADAPTER
for Extended
Single Duct Length

DEP-10
EVAPORATOR RETURN
AIR PLENUM

HK-1 3/8" x 10' HOSE KIT
HK-2 3/8" x 25' HOSE KIT
HK-5 3/8" x 40' HOSE KIT

Cooling done Right!
OCEANAIRE

OCEANAIRE-INC.COM
OA-TS-OWC1211-03012020