

OCEANAIRE

MODEL: OWC6032
5 TON DELUXE PORTABLE
WATER COOLED AIR CONDITIONER

TECHNICAL SPECIFICATIONS

COOLING CAPACITY	60,100 BTUH
VOLTAGE	208-230V, 60Hz, 3PH
AMPS	16.5
TOTAL WATTS	5000
IN RUSH AMPS	149
PLUG TYPE	L15-30P
EER	12.0
COMPRESSOR	SCROLL
COMPRESSOR HP	5
COMPRESSOR LRA	137
EVAP CFM - HIGH	1950
EVAP MOTOR HP	1
COND WATER FLOW (GPM)	
AT 60°F INLET	3.8
AT 85°F INLET	15
WATER VALVE CONNECTION (INLET)	5/8 MF
WATER RETURN CONNECTION	5/8 MF
CONDENSATE REMOVAL	PUMP AUTOMATIC
20' VERTICAL LIFT	3/8 MF
REFRIGERANT CHARGE	52 oz R-410A
HEIGHT	51-1/2 in
WIDTH	45-1/4 in
DEPTH	29 in
NET WEIGHT	375 lb



WATER COOLED



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air with 85°EWT and 105°LWT
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed
- OA CFM with free discharge
- OA Amps & Watts at 208 Volts

COOLING AMBIENT **OPERATING RANGE 65° TO 105°**
NOT APPROVED FOR OUTDOOR USE



Cooling done Right!
OCEANAIRE


OCEANAIRE-INC.COM
OA-TS-OWC6032-03012020

OCEANAIRE

MODEL: OWC6032
5 TON DELUXE PORTABLE
WATER COOLED AIR CONDITIONER

PRODUCT FEATURES

- OA SOLID STATE ELECTRONIC CONTROLLER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA INTERNAL CONDENSATE PUMP WITH OVERFLOW ALERT
- OA WATER REGULATING VALVE
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTER
- OA THREE PHASE MONITOR

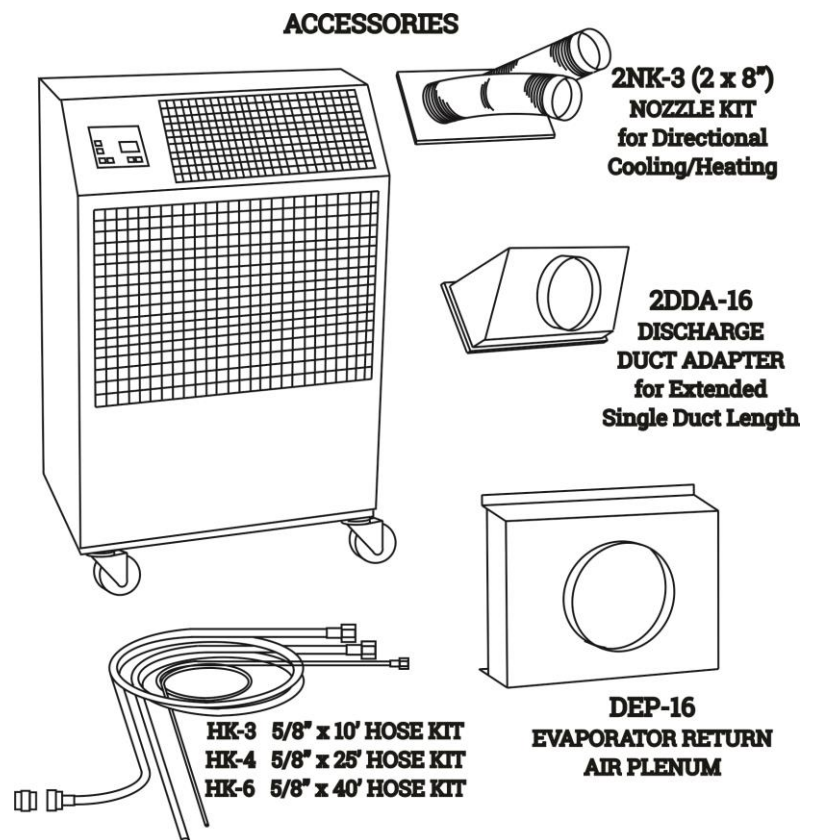

Cooling done Right!
OCEANAIRE

OCEANAIRE-INC.COM
OA-TS-OWC6032-03012020