

# OCEANAIRE

**MODEL: PAC1211**  
**1 TON SPOT COOLER**

## TECHNICAL SPECIFICATIONS

**COOLING CAPACITY 11,800 BTUH**

VOLTAGE	115V, 60Hz, 1PH
AMPS	10.4
TOTAL WATTS	1180
IN RUSH AMPS	60
PLUG TYPE	5-15P, LCDI
EER	10.0
COMPRESSOR	ROTARY
COMPRESSOR HP	1
COMPRESSOR LRA	50
EVAP CFM - HIGH	400
EVAP MOTOR HP	1/8
COND CFM	580
COND MOTOR HP	1/8
CONDENSATE TANK (Pump Optional)	5 GALLON
REFRIGERANT CHARGE	18 oz R-410A
HEIGHT	37-3/4 in
WIDTH	20 in
DEPTH	25 in
NET WEIGHT	180 lb



**AIR COOLED**



### SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into separate area
- OA CFM with free discharge
- OA Amps & Watts at 115 Volts

**COOLING AMBIENT OPERATING RANGE 65° TO 105°**

**NOT APPROVED FOR OUTDOOR USE**



*Cooling done Right!*

**OCEANAIRE**


OCEANAIRE-INC.COM  
OA-TS-PAC1211-03012020

# OCEANAIRE


**MODEL: PAC1211**  
**1 TON SPOT COOLER**

## PRODUCT FEATURES


- OA 24V CONTROL CIRCUIT WITH NON-PROGRAMMABLE ELECTRONIC THERMOSTAT
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA 2-SPEED FAN SWITCH
- OA CONDENSATE OVERFLOW ALERT LIGHT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTER

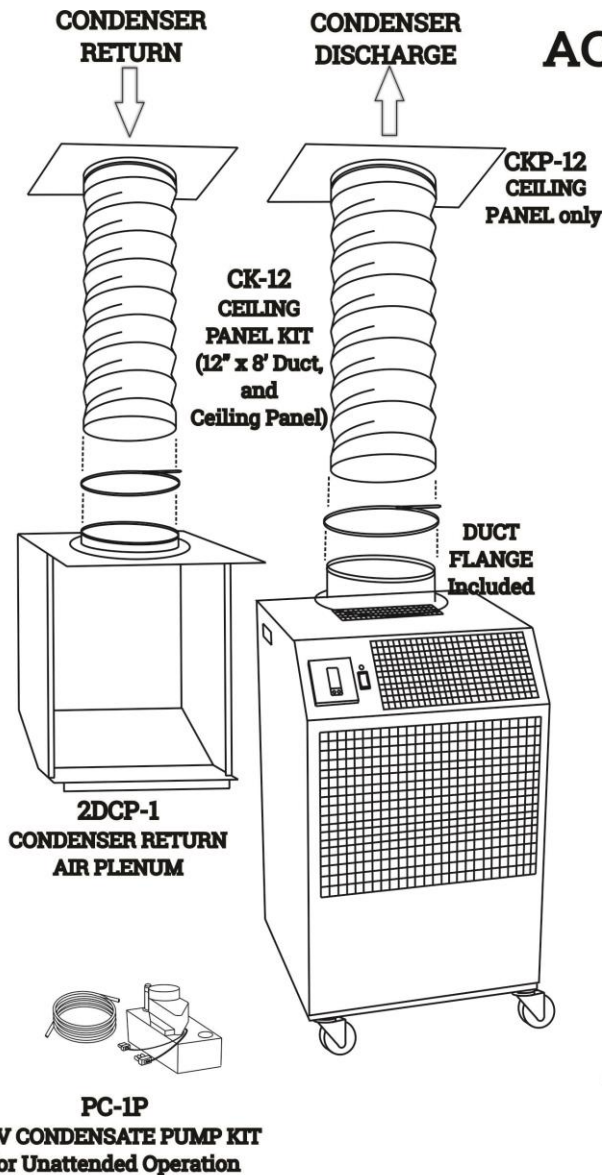


## ACCESSORIES



**2NK-1 (2 X 4'')**  
**NOZZLE KIT**  
for Directional  
Cooling/Heating



**2DDA-6**  
**DISCHARGE**  
**DUCT ADAPTER**  
for Extended  
Single Duct Length

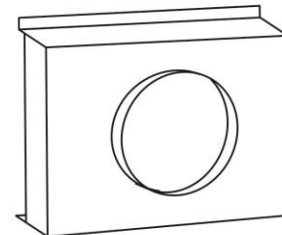

**DEP-10**  
**EVAPORATOR RETURN**  
**AIR PLENUM**

*Cooling done Right!*  
**OCEANAIRE**

OCEANAIRE-INC.COM  
OA-TS-PAC1211-03012020