

OCEANAIRE

MODEL: PAC2412
2 TON SPOT COOLER

TECHNICAL SPECIFICATIONS

COOLING CAPACITY 24,020 BTUH

VOLTAGE	208-230V, 60Hz, 1PH
AMPS	14.9
TOTAL WATTS	2700
IN RUSH AMPS	68
PLUG TYPE	6-20P, LCDI
EER	8.9
COMPRESSOR	Rotary
COMPRESSOR HP	2
COMPRESSOR LRA	48
EVAP CFM - HIGH	810
EVAP MOTOR HP	1/3
COND CFM	1010
COND MOTOR HP	1/3
CONDENSATE TANK (Pump Optional)	5 GALLON
REFRIGERANT CHARGE	37 oz R-410A
HEIGHT	45-3/4 in
WIDTH	24 in
DEPTH	30 in
NET WEIGHT	260 lb



AIR COOLED



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- ⓘ **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- ⓘ Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- ⓘ EER is determined at high fan speed, with condenser discharge air ducted into separate area
- ⓘ CFM with free discharge
- ⓘ Amps & Watts at 208 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°

NOT APPROVED FOR OUTDOOR USE



Cooling done Right!

OCEANAIRE


OCEANAIRE-INC.COM
OA-TS-PAC2412-03012020

OCEANAIRE


MODEL: PAC2412
2 TON SPOT COOLER

PRODUCT FEATURES


- OA 24V CONTROL CIRCUIT WITH NON-PROGRAMMABLE ELECTRONIC THERMOSTAT
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA 2-SPEED FAN SWITCH
- OA CONDENSATE OVERFLOW ALERT LIGHT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTER

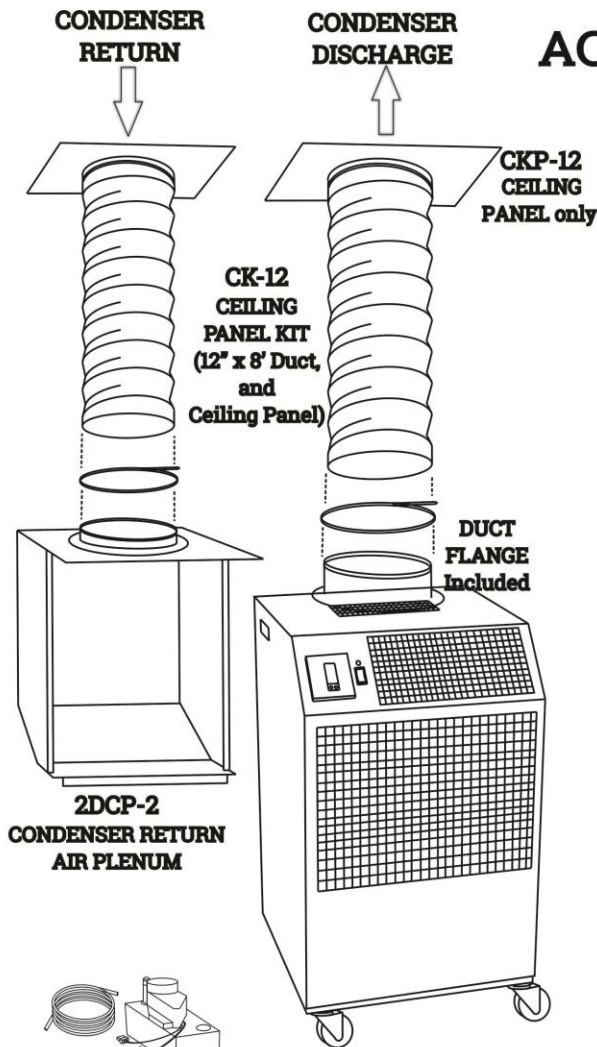


ACCESSORIES



2NK-2 (2 X 6")
NOZZLE KIT
for Directional
Cooling/Heating

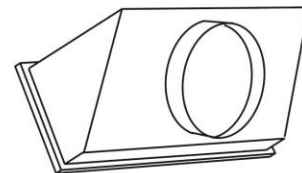

2DDA-10
DISCHARGE
DUCT ADAPTER
for Extended
Single Duct Length

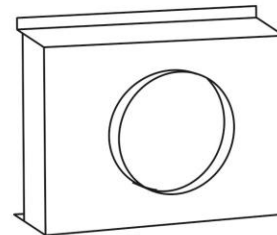

2DEP-12
EVAPORATOR RETURN
AIR PLENUM

PC-2P
208-230V CONDENSATE PUMP KIT
for Unattended Operation

Cooling done Right!
OCEANAIRE

OCEANAIRE-INC.COM
OA-TS-PAC2412-03012020