

OCEANAIRE

MODEL: PAC3634
3 TON SPOT COOLER

TECHNICAL SPECIFICATIONS

COOLING CAPACITY 36,050 BTUH

VOLTAGE 460V, 60Hz, 3PH

AMPS 8.7

TOTAL WATTS 3620

IN RUSH AMPS 60

PLUG TYPE L16-20P

EER 10.0

COMPRESSOR Scroll

COMPRESSOR HP 3

COMPRESSOR LRA 35

EVAP CFM - HIGH 1200

EVAP MOTOR HP 1/3

COND CFM 1390

COND MOTOR HP 1

CONDENSATE TANK 5 GALLON
(Pump Optional)

REFRIGERANT CHARGE 66 oz R-410A

HEIGHT 50-1/4 in

WIDTH 27-1/2 in

DEPTH 35 in

NET WEIGHT 400 lbs



AIR COOLED



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- ⓘ **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- ⓘ Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- ⓘ EER is determined at high fan speed, with condenser discharge air ducted into separate area
- ⓘ CFM with free discharge
- ⓘ Amps & Watts at 460 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°

NOT APPROVED FOR OUTDOOR USE



Cooling done Right!

OCEANAIRE


OCEANAIRE-INC.COM
OA-TS-PAC6034-03012020

OCEANAIRE


MODEL: PAC3634
3 TON SPOT COOLER

PRODUCT FEATURES


- OA 24V CONTROL CIRCUIT WITH NON-PROGRAMMABLE ELECTRONIC THERMOSTAT
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA 2-SPEED FAN SWITCH
- OA CONDENSATE OVERFLOW ALERT LIGHT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTER
- OA THREE PHASE MONITOR

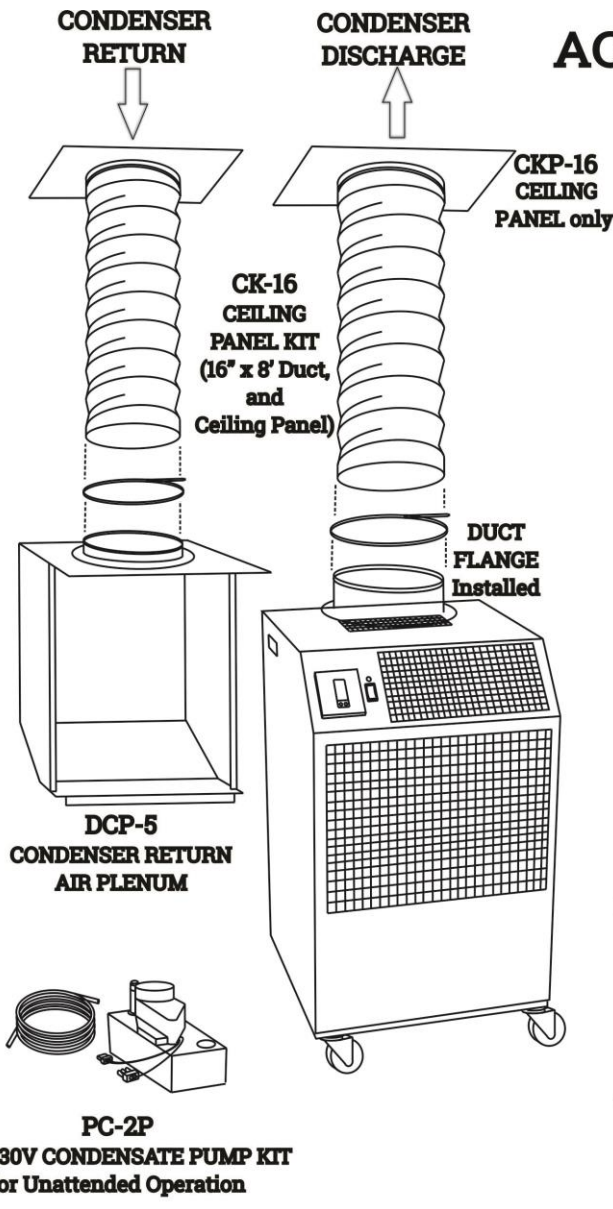


ACCESSORIES



2NK-3 (2 X 8")
NOZZLE KIT
for Directional
Cooling/Heating



2DDA-16
DISCHARGE
DUCT ADAPTER
for Extended
Single Duct Length



DEP-16
EVAPORATOR RETURN
AIR PLENUM

Cooling done Right!

OCEANAIRE

OCEANAIRE-INC.COM
OA-TS-PAC6034-03012020