

# OCEANAIRE

**MODEL: PAC6012**  
**5 TON SPOT COOLER**

## TECHNICAL SPECIFICATIONS

**COOLING CAPACITY 60,100 BTUH**

VOLTAGE	208-230V, 60Hz, 1PH
AMPS	32
TOTAL WATTS	6000
IN RUSH AMPS	178
PLUG TYPE	6-50P
EER	10.0
COMPRESSOR	Scroll
COMPRESSOR HP	5
COMPRESSOR LRA	158
EVAP CFM - HIGH	1950
EVAP MOTOR HP	1
COND CFM	2200
COND MOTOR HP	1
CONDENSATE REMOVAL	PUMP – 20 ft. Lift
REFRIGERANT CHARGE	80 oz R-410A
HEIGHT	51-3/4 in
WIDTH	27-1/2 in
DEPTH	39-1/2 in
NET WEIGHT	485 lb



**AIR COOLED**



### SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into separate area
- OA CFM with free discharge
- OA Amps & Watts at 208 Volts

**COOLING AMBIENT OPERATING RANGE 65° TO 105°**

**NOT APPROVED FOR OUTDOOR USE**



*Cooling done Right!*

**OCEANAIRE**


OCEANAIRE-INC.COM  
OA-TS-PAC6012-03012020

# OCEANAIRE


**MODEL: PAC6012**  
**5 TON SPOT COOLER**

## PRODUCT FEATURES


- OA 24V CONTROL CIRCUIT WITH NON-PROGRAMMABLE ELECTRONIC THERMOSTAT
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA 2-SPEED FAN SWITCH
- OA CONDENSATE OVERFLOW ALERT LIGHT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTER

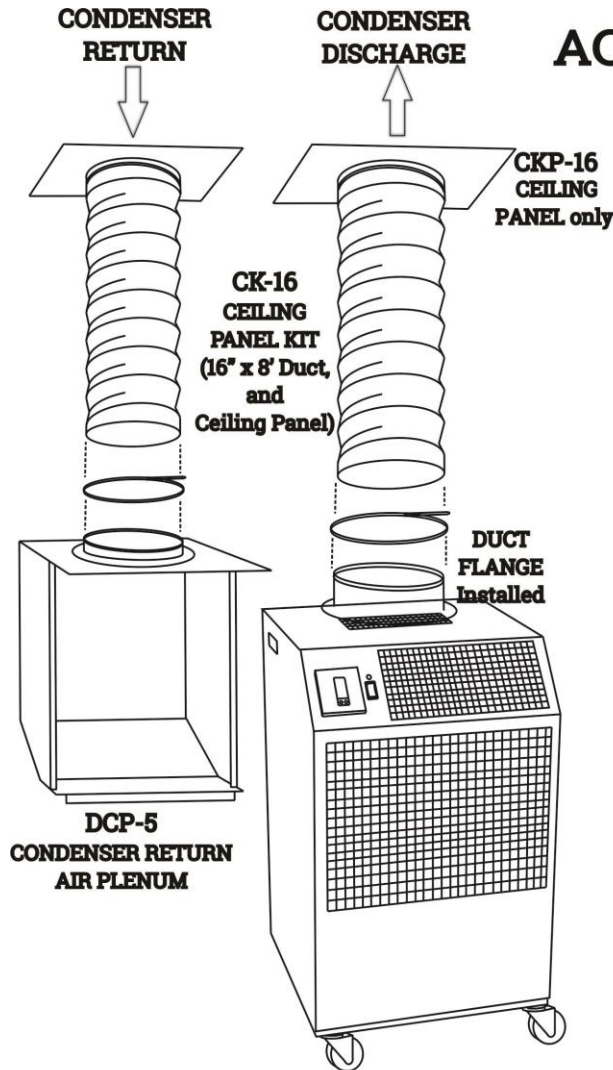


## ACCESSORIES



**2NK-3 (2 X 8")  
NOZZLE KIT**  
for Directional  
Cooling/Heating



**2DDA-16  
DISCHARGE  
DUCT ADAPTER**  
for Extended  
Single Duct Length



**DEP-16  
EVAPORATOR RETURN  
AIR PLENUM**

*Cooling done Right!*

# OCEANAIRE

OCEANAIRE-INC.COM  
OA-TS-PAC6012-03012020