

OCEANAIRE

MODEL: PAC6032
5 TON SPOT COOLER

TECHNICAL SPECIFICATIONS

COOLING CAPACITY 60,100 BTUH

VOLTAGE	208-230V, 60Hz, 3PH
AMPS	20.4
TOTAL WATTS	6000
IN RUSH AMPS	162
PLUG TYPE	L15-30P
EER	10.0
COMPRESSOR	Scroll
COMPRESSOR HP	5
COMPRESSOR LRA	137
EVAP CFM - HIGH	1950
EVAP MOTOR HP	1
COND CFM	2200
COND MOTOR HP	1
CONDENSATE REMOVAL	PUMP – 20 ft. Lift
REFRIGERANT CHARGE	80 oz R-410A
HEIGHT	51-3/4 in
WIDTH	27-1/2 in
DEPTH	39-1/2 in
NET WEIGHT	485 lbs



AIR COOLED



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- ⓘ **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- ⓘ Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- ⓘ EER is determined at high fan speed, with condenser discharge air ducted into separate area
- ⓘ CFM with free discharge
- ⓘ Amps & Watts at 208 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°

NOT APPROVED FOR OUTDOOR USE



Cooling done Right!

OCEANAIRE


OCEANAIRE-INC.COM
OA-TS-PAC6032-03012020

OCEANAIRE


MODEL: PAC6032
5 TON SPOT COOLER

PRODUCT FEATURES


- OA 24V CONTROL CIRCUIT WITH NON-PROGRAMMABLE ELECTRONIC THERMOSTAT
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA 2-SPEED FAN SWITCH
- OA CONDENSATE OVERFLOW ALERT LIGHT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTER
- OA THREE PHASE MONITOR

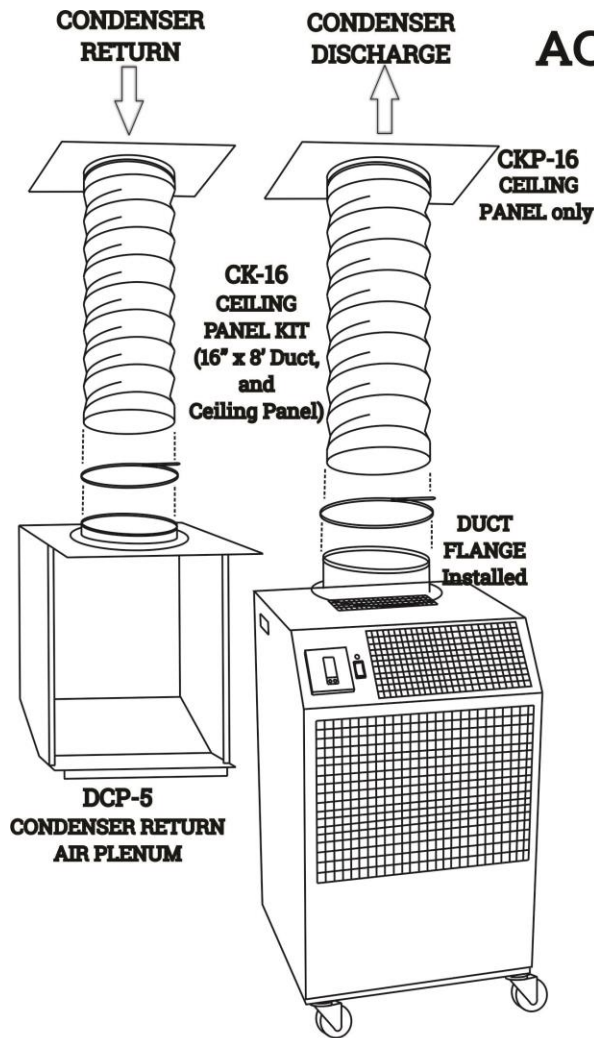


ACCESSORIES



**2NK-3 (2 X 8")
NOZZLE KIT
for Directional
Cooling/Heating**



**2DDA-16
DISCHARGE
DUCT ADAPTER
for Extended
Single Duct Length**



**DEP-16
EVAPORATOR RETURN
AIR PLENUM**

Cooling done Right!

OCEANAIRE

OCEANAIRE-INC.COM
OA-TS-PAC6032-03012020