OCEANAIRE

TECHNICAL SPECIFICATIONS

COOLING CAPACITY	16,800 BTUH
VOLTAGE AMPS	115V, 60Hz, 1PH 14.1
TOTAL WATTS	1670
IN RUSH AMPS	75 5 000 L 001
PLUG TYPE EER	5-20P, LCDI 10.0
COMPRESSOR	ROTARY
COMPRESSOR HP COMPRESSOR LRA	1-1/2 63
EVAP CFM - HIGH	600 1/0
EVAP MOTOR HP	1/8
COND CFM	930
COND MOTOR HP	1/8
CONDENSATE TANK	5 GALLON
(Pump Optional)	
REFRIGERANT CHARGE	40 oz R-410A
HEIGHT	45-3/4 in
WIDTH	24 in
DEPTH	30 in
NET WEIGHT	260 lb

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA Cooling Capacity is total BTUH at 80°DB/67°WB return air 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into separate area
- OA CFM with free discharge
- OA Amps & Watts at 115 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°

NOT APPROVED FOR OUTDOOR USE

Cooling done Right! OCEANAIRE OCEANAIRE-INC COM

OA-TS-20AC1811-02112021

MODEL: 20AC1811 1.5 TON DELUXE PORTABLE AIR CONDITIONER









OCEANAIRE

PRODUCT FEATURES


- OA SOLID STATE ELECTRONIC CONTROLLER
- OA AUTOMATIC MODE CHANGEOVER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS

for Unattended Operation

- OA CONDENSATE OVERFLOW ALERT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTERS



MODEL: 20AC1811 1.5 TON DELUXE PORTABLE

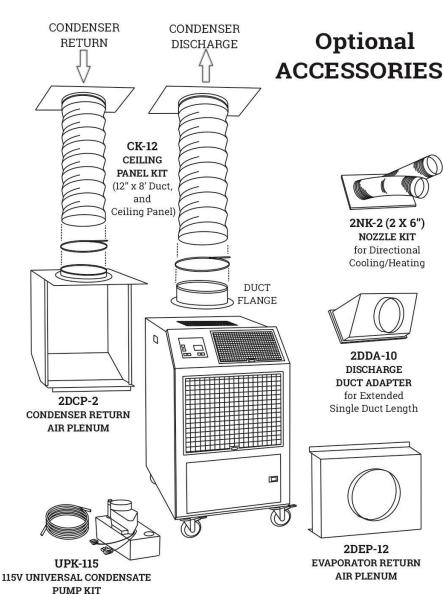

Cooling done Right! FANAIRE

OCEANAIRE-INC.COM OA-TS-20AC1811-02112021