

# OCEANAIRE

**MODEL: PAC3632**  
**3 TON PORTABLE SPOT COOLER**

## TECHNICAL SPECIFICATIONS

<b>COOLING CAPACITY</b>	<b>36,050 BTUH</b>
VOLTAGE	208-230V, 60Hz, 3PH
AMPS	17.2
TOTAL WATTS	3620
IN RUSH AMPS	93
PLUG TYPE	L15-30P
EER	10.0
COMPRESSOR	SCROLL
COMPRESSOR HP	3
COMPRESSOR LRA	77
EVAP CFM - HIGH	1200
EVAP MOTOR HP	1/3
COND CFM	1390
COND MOTOR HP	1
CONDENSATE TANK (Pump Optional)	5 GALLON
REFRIGERANT CHARGE	66 oz R-410A
HEIGHT	50-1/4 in
WIDTH	27-1/2 in
DEPTH	35 in
NET WEIGHT	365 lb



**AIR COOLED**



### SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- ⓘ **Cooling Capacity** is total BTUH at 80°DB/67°WB return air 95°F Outdoor at high fan speed
- ⓘ Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- ⓘ EER is determined at high fan speed, with condenser discharge air ducted into separate area
- ⓘ CFM with free dischargeS
- ⓘ Amps & Watts at 208 Volts

**COOLING AMBIENT OPERATING RANGE 65° TO 105°**

**NOT APPROVED FOR OUTDOOR USE**




*Cooling done Right!*  
**OCEANAIRE**

OCEANAIRE-INC.COM  
OA-TS-PAC3632-02112021




## PRODUCT FEATURES


- OA 24V CONTROL CIRCUIT WITH NON-PROGRAMMABLE ELECTRONIC THERMOSTAT
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA 2-SPEED FAN SWITCH
- OA CONDENSATE OVERFLOW ALERT LIGHT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTER
- OA THREE PHASE MONITOR

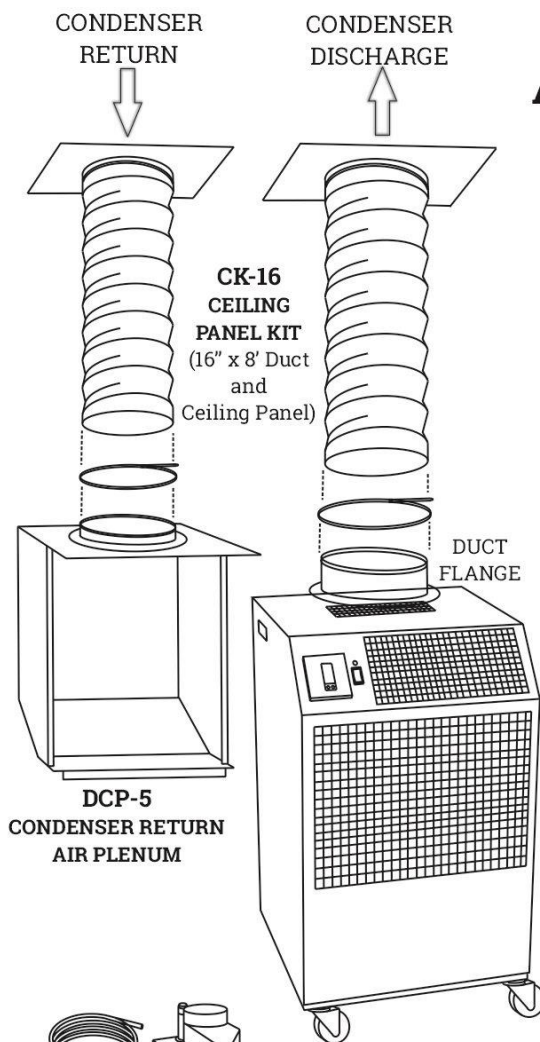


## Optional ACCESSORIES




**2NK-3 (2 X 8") NOZZLE KIT**  
 for Directional Cooling/Heating



**2DDA-16 DISCHARGE DUCT ADAPTER**  
 for Extended Single Duct Length



**DEP-16 EVAPORATOR RETURN AIR PLENUM**

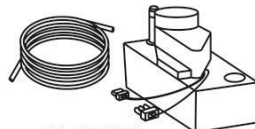

**UPK-230 230V UNIVERSAL CONDENSATE PUMP KIT**  
 for Unattended Operation