

MODEL: 2OAC2412

2 TON DELUXE PORTABLE SPOT COOLER – AIR COOLED



AIR COOLED

COOLING CAPACITY 24,020 BTUH

VOLTAGE 208-230V, 60Hz, 1PH
AMPS 14.9 A
TOTAL WATTS 2700 W

IN RUSH AMPS 68 A
PLUG TYPE 6-20P, LCDI
EER 8.9

COMPRESSOR HP 2
COMPRESSOR RLA 10.5
COMPRESSOR LRA 48

EVAP CFM - HIGH 810
EVAP MOTOR HP 1/3

COND CFM 1010
COND MOTOR HP 1/3 HP

CONDENSATE TANK 5 GALLON
(Pump Optional)

REFRIGERANT CHARGE 37oz R-410A

HEIGHT 45-3/4 in
WIDTH 24 in
DEPTH 30 in

NET WEIGHT 260 lb



WARRANTY

ALL OCEANAIRE PRODUCTS ARE COVERED BY THE OCEANAIRE LIMITED WARRANTY

1 YEAR ON THE FULL PRODUCT PLUS, 4 ADDITIONAL YEARS FOR THE COMPRESSOR (RESTRICTIONS APPLY)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into another area
- OA CFM with free discharge
- OA Amps & Watts at 208 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°

NOT APPROVED FOR OUTDOOR USE



PRODUCT FEATURES


- OA SOLID STATE ELECTRONIC CONTROLLER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA REAR SWIVEL CASTERS
- OA FRONT SWIVEL CASTERS WITH BRAKES
- OA CONDENSATE ALERT
- OA LCDI POWER CORD
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTERS

MODEL: 2OAC2412

2 TON DELUXE PORTABLE SPOT COOLER



ACCESSORIES

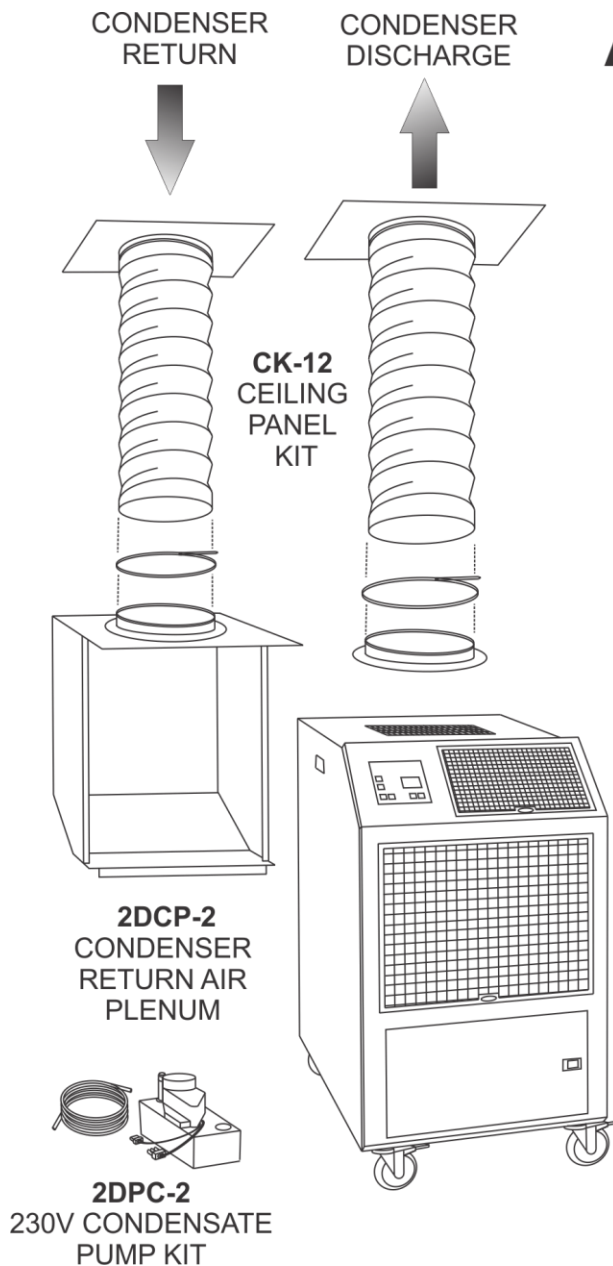

2DDA-10
DISCHARGE
DUCT ADAPTER



2DEP-12
EVAPORATOR
RETURN AIR PLENUM

