

### MODEL: 2OAC3612

### 3 TON DELUXE PORTABLE SPOT COOLER – AIR COOLED



AIR COOLED

<b>COOLING CAPACITY</b>	<b>36,050 BTUH</b>
VOLTAGE	208-230V, 60 Hz, 1PH
AMPS	19.6 A
TOTAL WATTS	3620 W
IN RUSH AMPS	113 A
PLUG TYPE	6-30P, LCDI
EER	10.0
COMPRESSOR HP	3
COMPRESSOR RLA	13.6
COMPRESSOR LRA	83
EVAP CFM - HIGH	1200
EVAP MOTOR HP	1/3
COND CFM	1390
COND MOTOR HP	1 HP
CONDENSATE TANK (Pump Optional)	5 GALLON
REFRIGERANT CHARGE	66 oz R-410A
HEIGHT	50-1/4 in
WIDTH	27-1/2 in
DEPTH	35 in
NET WEIGHT	365 lb



### WARRANTY

ALL OCEANAIRE PRODUCTS ARE COVERED BY THE OCEANAIRE LIMITED WARRANTY

1 YEAR ON THE FULL PRODUCT  
PLUS, 4 ADDITIONAL YEARS FOR THE COMPRESSOR  
(RESTRICTIONS APPLY)

### SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into another area
- OA CFM with free discharge
- OA Amps & Watts at 115 Volts

**COOLING AMBIENT OPERATING RANGE 65° TO 105°**

**NOT APPROVED FOR OUTDOOR USE**




### PRODUCT FEATURES

- OA SOLID STATE ELECTRONIC CONTROLLER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA REAR SWIVEL CASTERS
- OA FRONT SWIVEL CASTERS WITH BRAKES
- OA CONDENSATE ALERT
- OA LCDI POWER CORD
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTERS

**MODEL: 20AC3612**

**3 TON DELUXE PORTABLE SPOT COOLER**

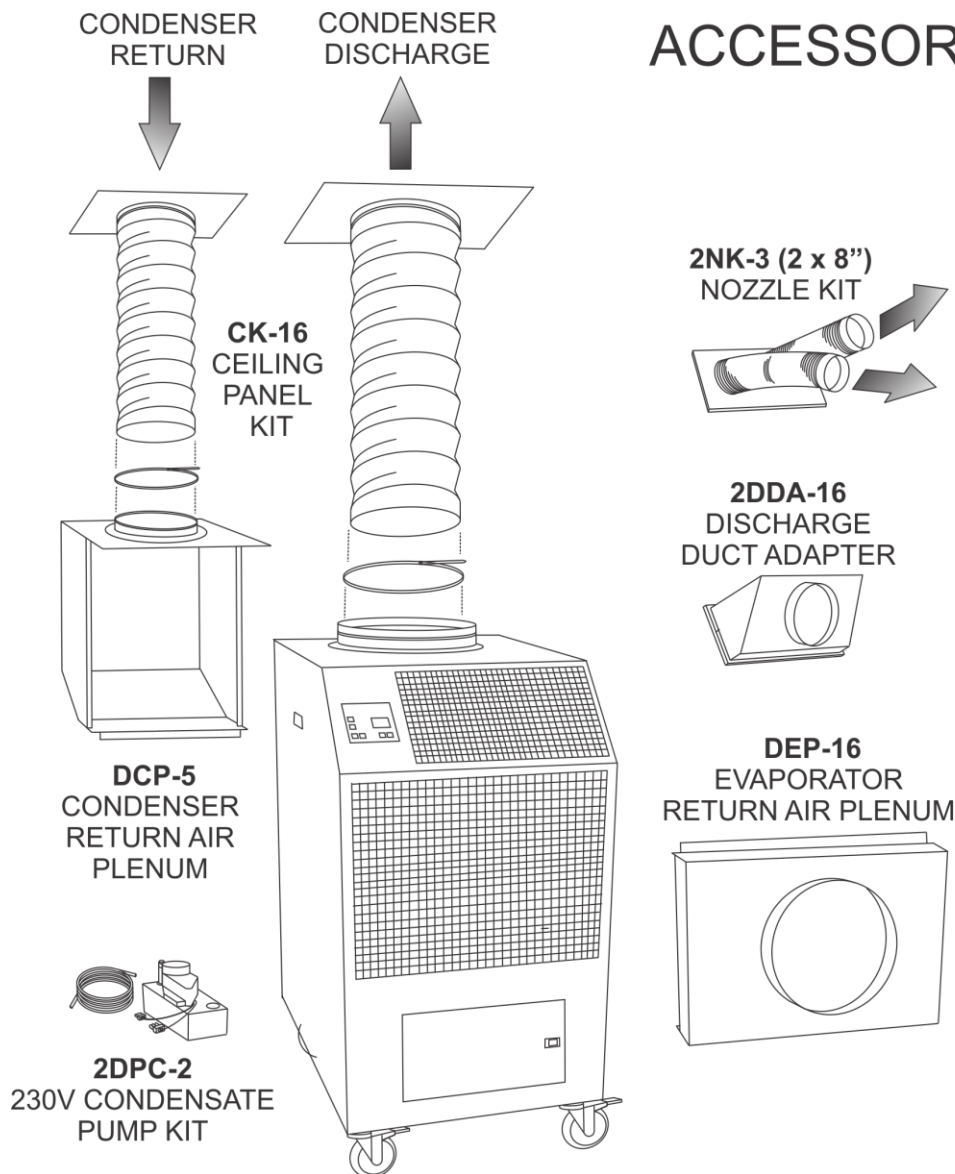

## ACCESSORIES

**NOTE: 20AC36-MODELS SHIP WITH 16-INCH FLANGE**