

### MODEL: 2OAC3632

### 3 TON DELUXE PORTABLE SPOT COOLER – AIR COOLED



**AIR COOLED**

#### COOLING CAPACITY 36,050 BTUH

VOLTAGE 208-230V, 60Hz, 3PH  
 AMPS 17.2 A  
 TOTAL WATTS 3620 W

IN RUSH AMPS 93 A  
 PLUG TYPE L15-30P  
 EER 10.0

COMPRESSOR HP 3  
 COMPRESSOR RLA 8.8  
 COMPRESSOR LRA 77

EVAP CFM - HIGH 1200  
 EVAP MOTOR HP 1/3

COND CFM 1390  
 COND MOTOR HP 1 HP

CONDENSATE TANK 5 GALLON  
 (Pump Optional)

REFRIGERANT CHARGE 66 oz R-410A

HEIGHT 50-1/4 in  
 WIDTH 27-1/2 in  
 DEPTH 35 in

NET WEIGHT 365 lb



### WARRANTY

ALL OCEANAIRE PRODUCTS ARE COVERED BY THE OCEANAIRE LIMITED WARRANTY

1 YEAR ON THE FULL PRODUCT PLUS, 4 ADDITIONAL YEARS FOR THE COMPRESSOR (RESTRICTIONS APPLY)

#### SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into another area
- OA CFM with free discharge
- OA Amps & Watts at 208 Volts

**COOLING AMBIENT OPERATING RANGE 65° TO 105°**

**NOT APPROVED FOR OUTDOOR USE**



### PRODUCT FEATURES


- OA SOLID STATE ELECTRONIC CONTROLLER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA REAR SWIVEL CASTERS
- OA FRONT SWIVEL CASTERS WITH BRAKES
- OA CONDENSATE ALERT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTERS

**MODEL: 2OAC3632**

**3 TON DELUXE PORTABLE SPOT COOLER**



## ACCESSORIES

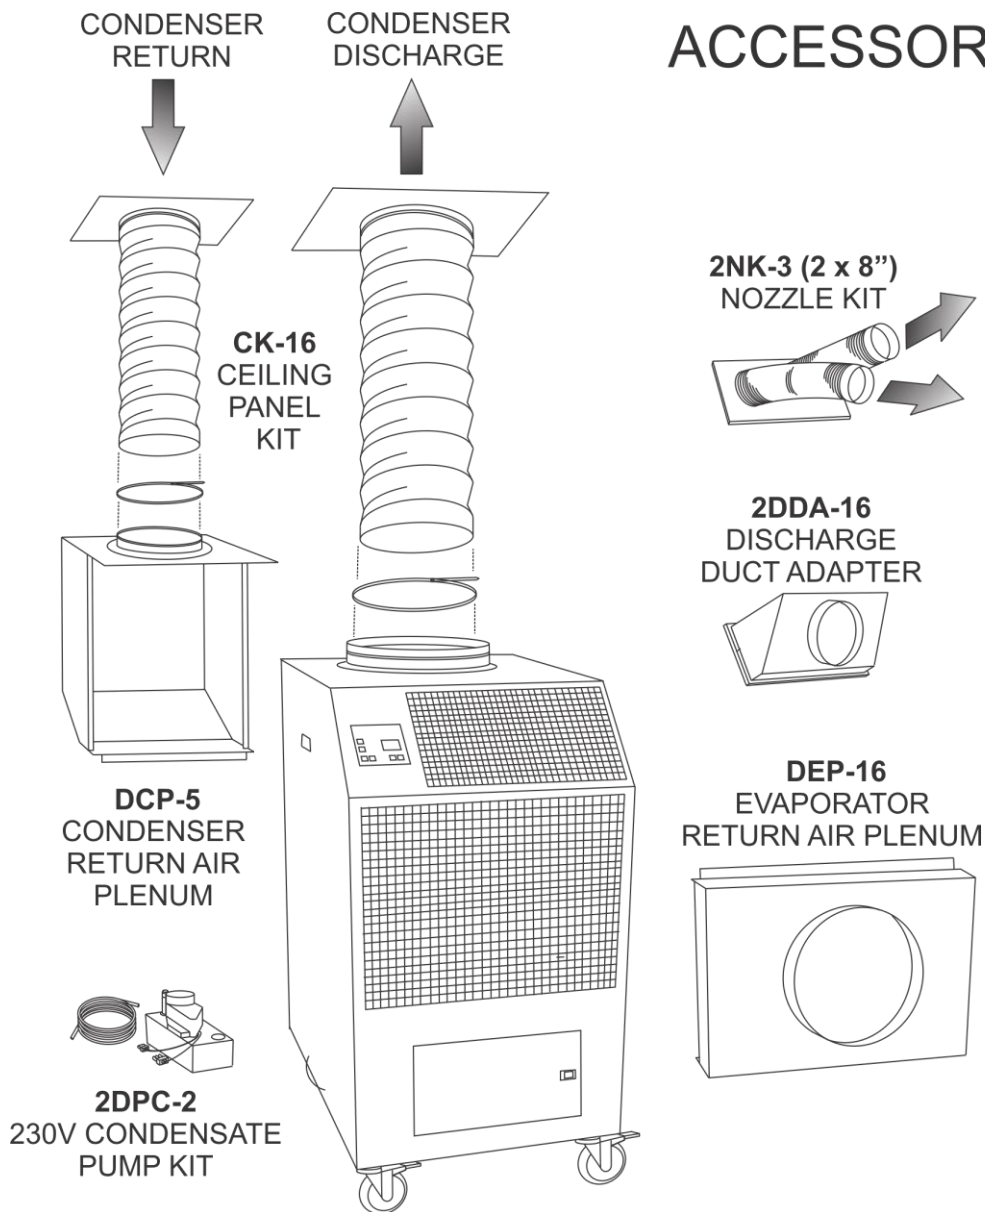

**NOTE: 2OAC36-MODELS SHIP WITH 16-INCH FLANGE**