

MODEL: 2OAC3634

3 TON DELUXE PORTABLE SPOT COOLER – AIR COOLED



AIR COOLED

COOLING CAPACITY 36,050 BTUH

VOLTAGE 460V, 60Hz, 3PH
AMPS 8.7 A
TOTAL WATTS 3620 W

IN RUSH AMPS 60 A
PLUG TYPE L16-20P
EER 10.0

COMPRESSOR HP 3
COMPRESSOR RLA 5.0
COMPRESSOR LRA 35

EVAP CFM - HIGH 1200
EVAP MOTOR HP 1/3

COND CFM 1390
COND MOTOR HP 1 HP

CONDENSATE TANK 5 GALLON
(Pump Optional)

REFRIGERANT CHARGE 66 oz R-410A

HEIGHT 50-1/4 in
WIDTH 27-1/2 in
DEPTH 35 in

NET WEIGHT 365 lb



WARRANTY

ALL OCEANAIRE PRODUCTS ARE COVERED BY THE OCEANAIRE LIMITED WARRANTY

1 YEAR ON THE FULL PRODUCT
PLUS, 4 ADDITIONAL YEARS FOR THE COMPRESSOR
(RESTRICTIONS APPLY)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into another area
- OA CFM with free discharge
- OA Amps & Watts at 460 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°

NOT APPROVED FOR OUTDOOR USE



PRODUCT FEATURES


- OA SOLID STATE ELECTRONIC CONTROLLER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA REAR SWIVEL CASTERS
- OA FRONT SWIVEL CASTERS WITH BRAKES
- OA CONDENSATE ALERT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTERS

MODEL: 20AC3634

3 TON DELUXE PORTABLE SPOT COOLER



ACCESSORIES

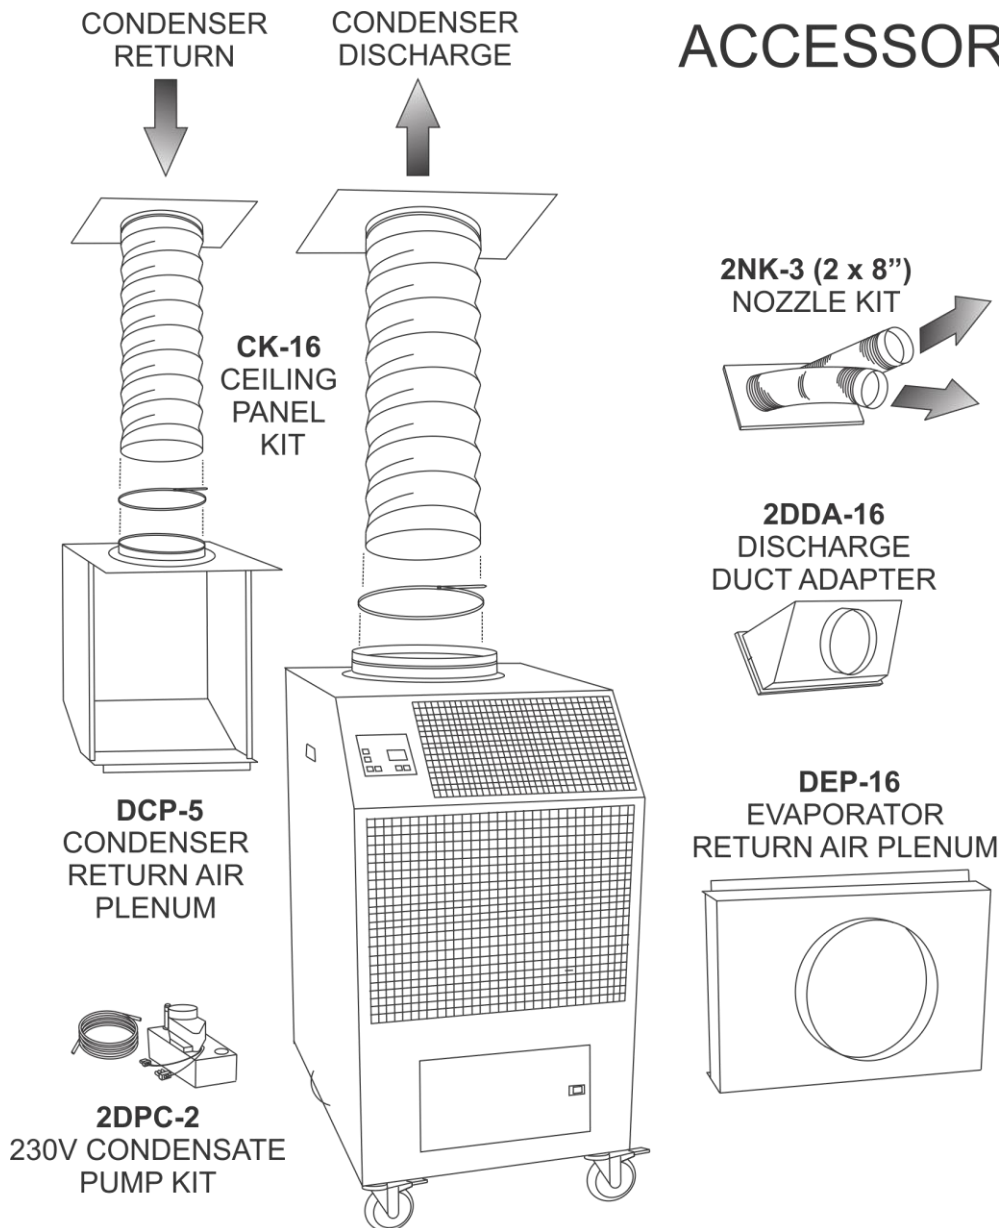

NOTE: 20AC36-MODELS SHIP WITH 16-INCH FLANGE