

# OCEANAIRE

## TECHNICAL SPECIFICATIONS

**MODEL: 2OAC6012**

**5 TON DELUXE PORTABLE SPOT COOLER - AIR COOLED**



**AIR COOLED**

<b>COOLING CAPACITY</b>	<b>60,100 BTUH</b>
VOLTAGE	208-230V, 60Hz, 1PH
AMPS	32 A
TOTAL WATTS	6000 W
IN RUSH AMPS	178 A
PLUG TYPE	6-50P, LCDI
EER	10.0
COMPRESSOR HP	5
COMPRESSOR RLA	27.6
COMPRESSOR LRA	158
EVAP CFM - HIGH	1950
EVAP MOTOR HP	1
COND CFM	2200
COND MOTOR HP	1 HP
CONDENSATE TANK	PUMP – Standard (20 ft. Lift)
REFRIGERANT CHARGE	80 oz R-410A
HEIGHT	51-3/4 in
WIDTH	27-1/2 in
DEPTH	39-1/2 in
NET WEIGHT	485 lb



### WARRANTY

ALL OCEANAIRE PRODUCTS ARE COVERED BY THE OCEANAIRE LIMITED WARRANTY

1 YEAR ON THE FULL PRODUCT PLUS, 4 ADDITIONAL YEARS FOR THE COMPRESSOR (RESTRICTIONS APPLY)

### SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into another area
- OA CFM with free discharge
- OA Amps & Watts at 115 Volts

**COOLING AMBIENT OPERATING RANGE 65° TO 105°**

**NOT APPROVED FOR OUTDOOR USE**




### PRODUCT FEATURES

- OA SOLID STATE ELECTRONIC CONTROLLER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA REAR SWIVEL CASTERS
- OA FRONT SWIVEL CASTERS WITH BRAKES
- OA CONDENSATE ALERT
- OA LCDI POWER CORD
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTERS

**MODEL: 20AC6012**


**5 TON DELUXE PORTABLE SPOT COOLER**

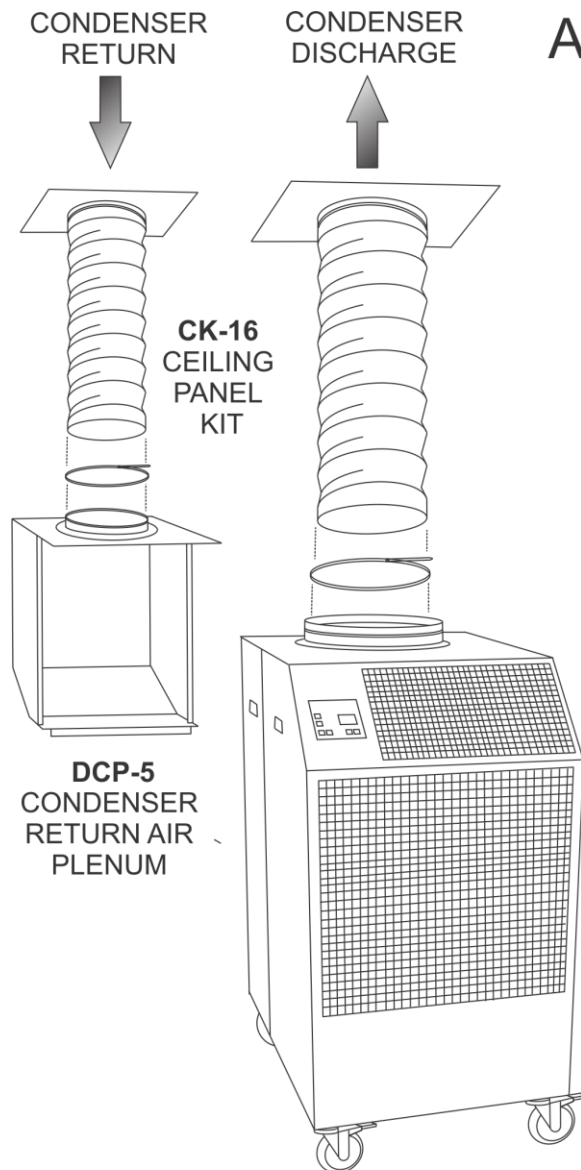


### ACCESSORIES



**2DDA-16**  
DISCHARGE  
DUCT ADAPTER



**DEP-16**  
EVAPORATOR  
RETURN AIR PLENUM



**NOTE: 20AC60-MODELS SHIP WITH 16-INCH FLANGE**