

OCEANAIRE

TECHNICAL SPECIFICATIONS

MODEL: 2OACH3612
3 TON PORTABLE HEAT PUMP



HEATING & COOLING

COOLING CAPACITY	36,050 BTUH
HEATING CAPACITY	32,500 BTUH
VOLTAGE	208-230V, 60 Hz, 1PH
AMPS	19.6 A
TOTAL WATTS	3620 W
IN RUSH AMPS	113 A
PLUG TYPE	6-30P, LCDI
EER	10.0
COMPRESSOR HP	3
COMPRESSOR RLA	13.6
COMPRESSOR LRA	83
EVAP CFM - HIGH	1200
EVAP MOTOR HP	1/3
COND CFM	1390
COND MOTOR HP	1 HP
CONDENSATE TANK (Pump Optional)	5 GALLON
REFRIGERANT CHARGE	66 oz R-410A
HEIGHT	50-1/4 in
WIDTH	27-1/2 in
DEPTH	35 in
NET WEIGHT	365 lb



WARRANTY

ALL OCEANAIRE PRODUCTS ARE COVERED BY THE
OCEANAIRE LIMITED WARRANTY

1 YEAR ON THE FULL PRODUCT
PLUS, 4 ADDITIONAL YEARS FOR THE COMPRESSOR
(RESTRICTIONS APPLY)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA **Heating Capacity** is total BTUH at 70°DB/60°WB indoor, 47°DB/43°WB Outdoor
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into another area
- OA CFM with free discharge
- OA Amps & Watts at 115 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°
HEATING AMBIENT OPERATING RANGE 40° TO 85°

NOT APPROVED FOR OUTDOOR USE



OCEANAIRE
OCEANAIRE-INC.COM
OA-TS-2OACH3612-01012019


OCEANAIRE

TECHNICAL SPECIFICATIONS

PRODUCT FEATURES

- OA SOLID STATE ELECTRONIC CONTROLLER
- OA AUTOMATIC MODE CHANGEOVER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA REAR SWIVEL CASTERS
- OA FRONT SWIVEL CASTERS WITH BRAKES
- OA CONDENSATE ALERT
- OA LCDI POWER CORD
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTERS

MODEL: 2OACH3612
3 TON PORTABLE HEAT PUMP

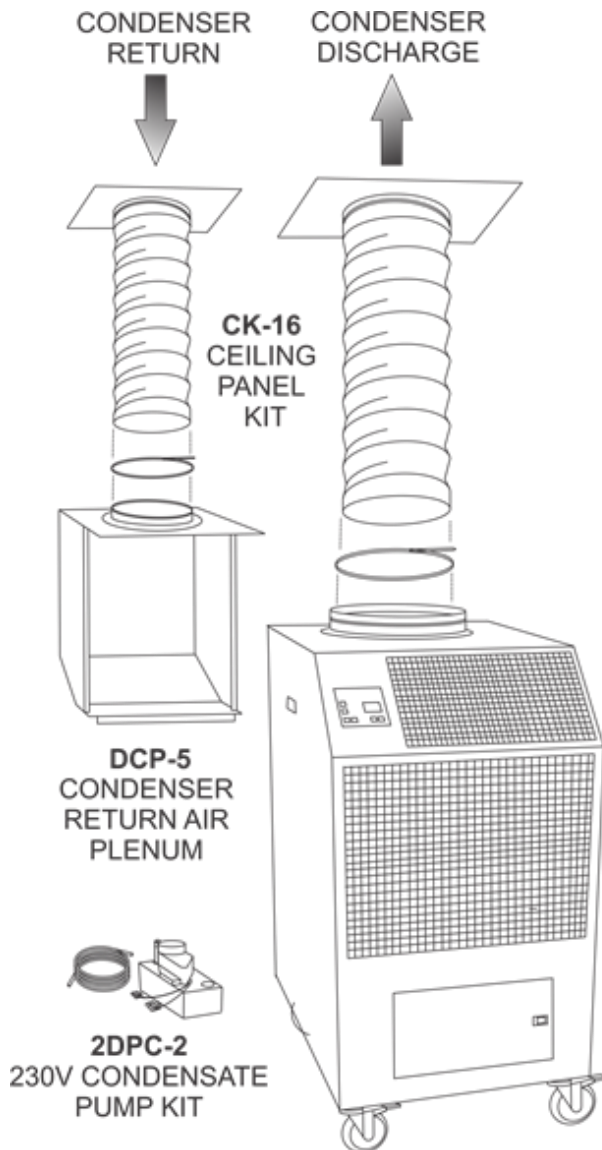

ACCESSORIES

2NK-3 (2 x 8")
NOZZLE KIT



2DDA-16
DISCHARGE
DUCT ADAPTER



DEP-16
EVAPORATOR
RETURN AIR PLENUM



NOTE: 2OACH36-MODELS SHIP WITH 16-INCH FLANGE