

OCEANAIRE

TECHNICAL SPECIFICATIONS

MODEL: 2OACH3634
3 TON PORTABLE HEAT PUMP



HEATING & COOLING

COOLING CAPACITY 36,050 BTUH
HEATING CAPACITY 32,500 BTUH

VOLTAGE	460V, 60Hz, 3PH
AMPS	8.7 A
TOTAL WATTS	3620 W
IN RUSH AMPS	60 A
PLUG TYPE	L16-20P
EER	10.0
COMPRESSOR HP	3
COMPRESSOR RLA	5.0
COMPRESSOR LRA	35
EVAP CFM - HIGH	1200
EVAP MOTOR HP	1/3
COND CFM	1390
COND MOTOR HP	1 HP
CONDENSATE TANK (Pump Optional)	5 GALLON
REFRIGERANT CHARGE	66 oz R-410A
HEIGHT	50-1/4 in
WIDTH	27-1/2 in
DEPTH	35 in
NET WEIGHT	365 lb



WARRANTY

ALL OCEANAIRE PRODUCTS ARE COVERED BY THE
OCEANAIRE LIMITED WARRANTY

1 YEAR ON THE FULL PRODUCT
PLUS, 4 ADDITIONAL YEARS FOR THE COMPRESSOR
(RESTRICTIONS APPLY)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA **Heating Capacity** is total BTUH at 70°DB/60°WB indoor, 47°DB/43°WB Outdoor
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into another area
- OA CFM with free discharge
- OA Amps & Watts at 115 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°
HEATING AMBIENT OPERATING RANGE 40° TO 85°

NOT APPROVED FOR OUTDOOR USE



OCEANAIRE

OCEANAIRE-INC.COM

OA-TS-2OACH3634-01012019

S

OCEANAIRE

TECHNICAL SPECIFICATIONS


PRODUCT FEATURES

- OA SOLID STATE ELECTRONIC CONTROLLER
- OA AUTOMATIC MODE CHANGEOVER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA REAR SWIVEL CASTERS
- OA FRONT SWIVEL CASTERS WITH BRAKES
- OA CONDENSATE ALERT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTERS

MODEL: 2OACH3634
3 TON PORTABLE HEAT PUMP



ACCESSORIES

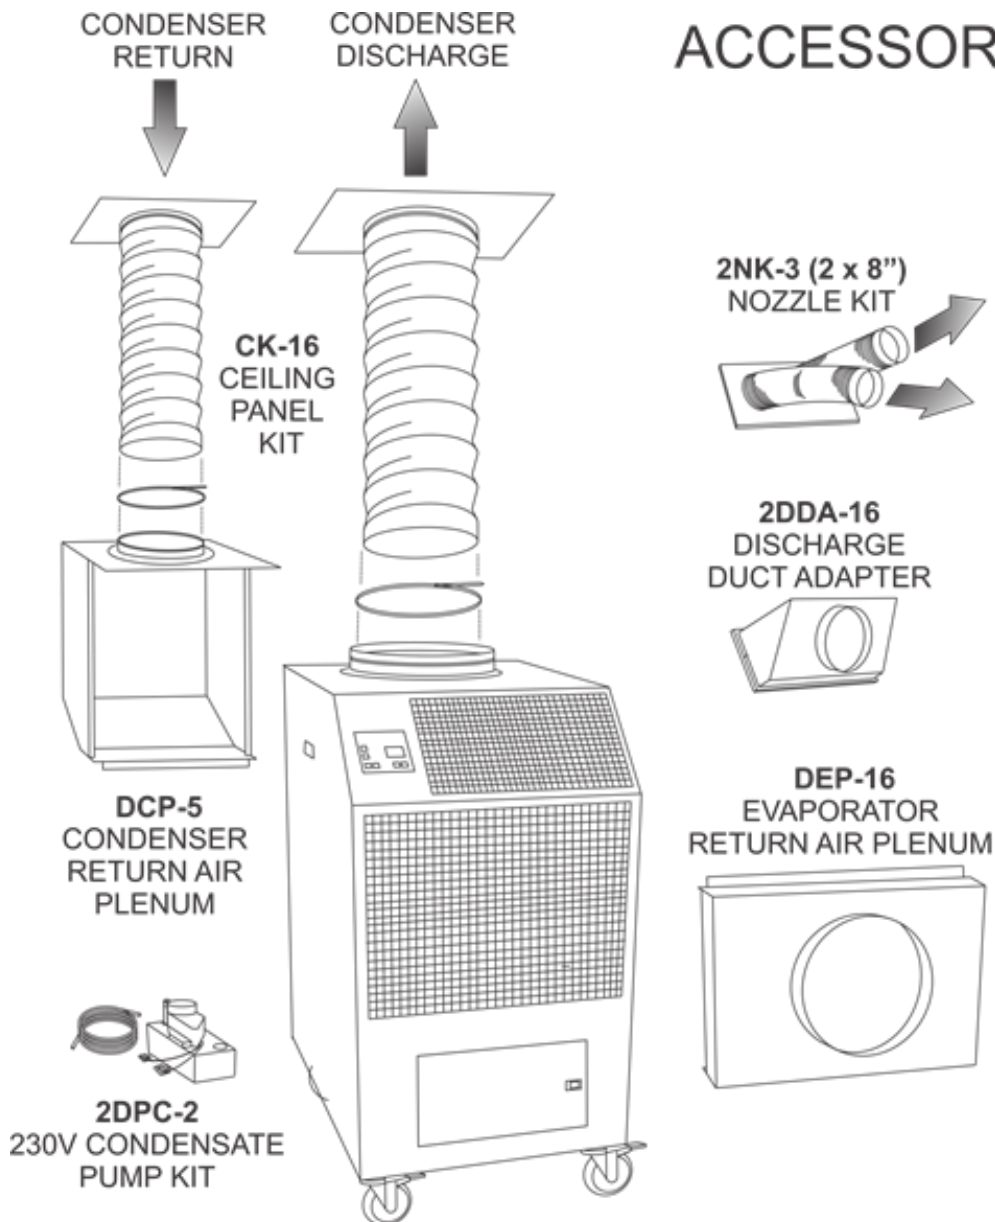

NOTE: 2OACH36-MODELS SHIP WITH 16-INCH FLANGE

OCEANAIRE

OCEANAIRE-INC.COM

OA-TS-2OACH3634-01012019