

OCEANAIRE

TECHNICAL SPECIFICATIONS

MODEL: 2OACH6032
5 TON PORTABLE HEAT PUMP

COOLING CAPACITY 60,100 BTUH
HEATING CAPACITY 53,500 BTUH

VOLTAGE	208-230V, 60Hz, 3PH
AMPS	20.4 A
TOTAL WATTS	6000 W
IN RUSH AMPS	162 A
PLUG TYPE	L15-30P
EER	10.0
COMPRESSOR HP	5
COMPRESSOR RLA	18.1
COMPRESSOR LRA	137
EVAP CFM - HIGH	1950
EVAP MOTOR HP	1
COND CFM	2200
COND MOTOR HP	1 HP
CONDENSATE TANK	PUMP – Standard (20 ft. Lift)
REFRIGERANT CHARGE	80 oz R-410A
HEIGHT	51-3/4 in
WIDTH	27-1/2 in
DEPTH	39-1/2 in
NET WEIGHT	485 lb



HEATING & COOLING



WARRANTY

ALL OCEANAIRE PRODUCTS ARE COVERED BY THE OCEANAIRE LIMITED WARRANTY

1 YEAR ON THE FULL PRODUCT
PLUS, 4 ADDITIONAL YEARS FOR THE COMPRESSOR
(RESTRICTIONS APPLY)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA **Heating Capacity** is total BTUH at 70°DB/60°WB indoor, 47°DB/43°WB Outdoor
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into another area
- OA CFM with free discharge
- OA Amps & Watts at 115 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°
HEATING AMBIENT OPERATING RANGE 40° TO 85°

NOT APPROVED FOR OUTDOOR USE



OCEANAIRE
OCEANAIRE-INC.COM
OA-TS-2OACH6032-01012019


OCEANAIRE

TECHNICAL SPECIFICATIONS

PRODUCT FEATURES

- OA SOLID STATE ELECTRONIC CONTROLLER
- OA AUTOMATIC MODE CHANGEOVER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA REAR SWIVEL CASTERS
- OA FRONT SWIVEL CASTERS WITH BRAKES
- OA INTERNAL CONDENSATE PUMP WITH OVERFLOW ALERT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTERS

MODEL: 2OACH6032
5 TON PORTABLE HEAT PUMP

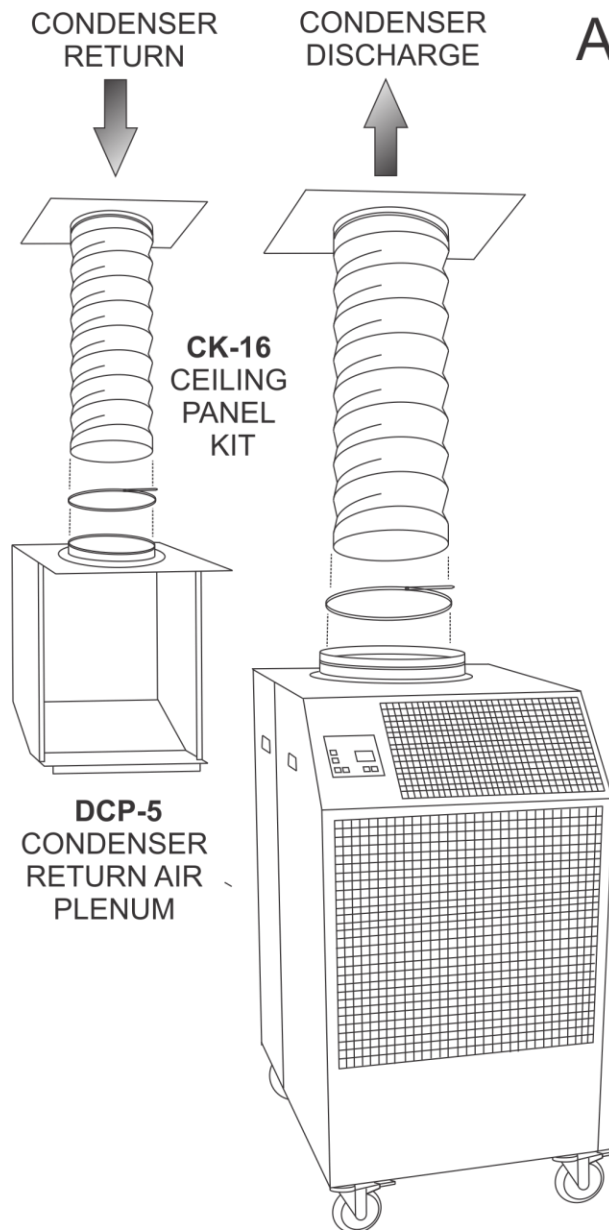

ACCESSORIES


2NK-3 (2 x 8")
NOZZLE KIT



2DDA-16
DISCHARGE
DUCT ADAPTER



DEP-16
EVAPORATOR
RETURN AIR PLENUM



NOTE: 2OACH60-MODELS SHIP WITH 16-INCH FLANGE

OCEANAIRE
OCEANAIRE-INC.COM
OA-TS-2OACH6032-01012019