

# OCEANAIRE

**MODEL: 2OAC3632**  
**3 TON DELUXE PORTABLE**  
**AIR CONDITIONER**

## TECHNICAL SPECIFICATIONS

<b>COOLING CAPACITY</b>	<b>36,050 BTUH</b>
VOLTAGE	208-230V, 60Hz, 3PH
AMPS	17.2
TOTAL WATTS	3620
IN RUSH AMPS	93
PLUG TYPE	L15-30P
EER	10.0
COMPRESSOR	SCROLL
COMPRESSOR HP	3
COMPRESSOR LRA	77
EVAP CFM - HIGH	1200
EVAP MOTOR HP	1/3
COND CFM	1390
COND MOTOR HP	1
CONDENSATE TANK (Pump Optional)	5 GALLON
REFRIGERANT CHARGE	66 oz R-410A
HEIGHT	50-1/4 in
WIDTH	27-1/2 in
DEPTH	35 in
NET WEIGHT	365 lb



**AIR COOLED**



### **SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE**

- ⓘ **Cooling Capacity** is total BTUH at 80°DB/67°WB return air  
95°F Outdoor at high fan speed
- ⓘ Dedicated Circuit and Time Delay fuses/circuit breakers  
are recommended
- ⓘ EER is determined at high fan speed, with condenser  
discharge air ducted into separate area
- ⓘ CFM with free discharge
- ⓘ Amps & Watts at 208 Volts

**COOLING AMBIENT OPERATING RANGE 65° TO 105°**

**NOT APPROVED FOR OUTDOOR USE**

*Cooling done Right!*  
**OCEANAIRE**


OCEANAIRE-INC.COM  
OA-TS-2OAC3632-02112021

# OCEANAIRE


**MODEL: 20AC3632**  
**3 TON DELUXE PORTABLE**  
**AIR CONDITIONER**

## PRODUCT FEATURES


- OA SOLID STATE ELECTRONIC CONTROLLER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA CONDENSATE OVERFLOW ALERT
- OA HIGH PRESSURE SAFETY SWITCH
- OA THREE PHASE MONITOR
- OA WASHABLE ELECTROSTATIC AIR FILTERS

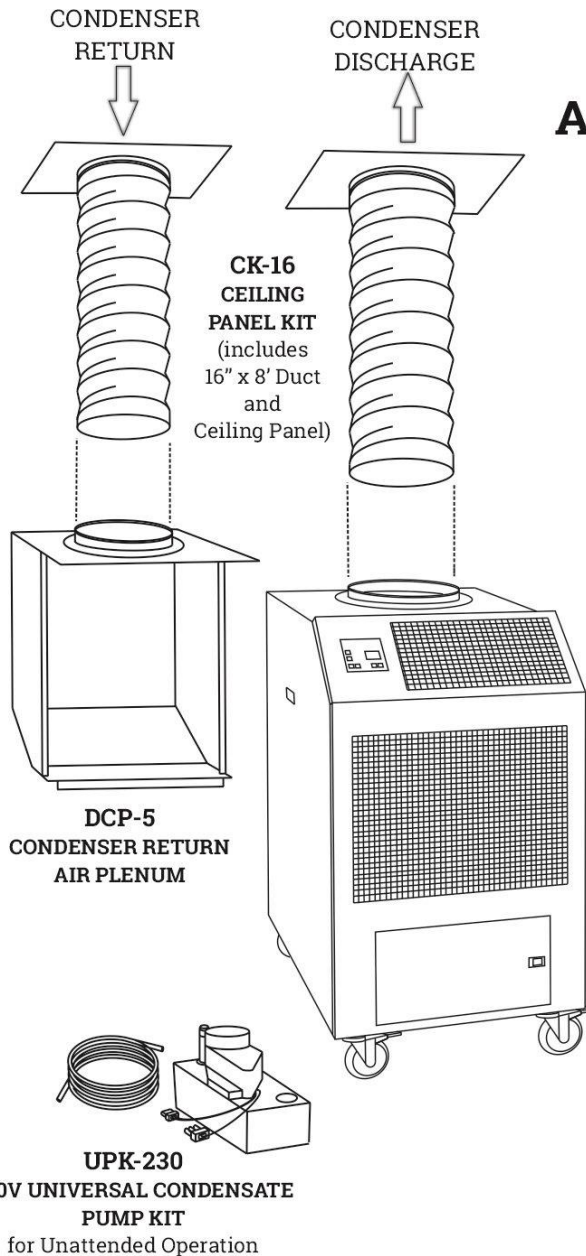


## Optional ACCESSORIES



**2NK-3 (2 X 8'')**  
**NOZZLE KIT**  
for Directional  
Cooling/Heating



**2DDA-16**  
**DISCHARGE**  
**DUCT ADAPTER**  
for Extended  
Single Duct Length



**DEP-16**  
**EVAPORATOR RETURN**  
**AIR PLENUM**

*Cooling done Right!*  
**OCEANAIRE**

OCEANAIRE-INC.COM  
OA-TS-20AC3632-02112021