

# OCEANAIRE

**MODEL: 20AC6032**  
**5 TON DELUXE PORTABLE**  
**AIR CONDITIONER**

## TECHNICAL SPECIFICATIONS

<b>COOLING CAPACITY</b>	<b>60,100 BTUH</b>
VOLTAGE	208-230V, 60Hz, 3PH
AMPS	20.4
TOTAL WATTS	6000
IN RUSH AMPS	162
PLUG TYPE	L15-30P
EER	10.0
COMPRESSOR	SCROLL
COMPRESSOR HP	5
COMPRESSOR LRA	137
EVAP CFM - HIGH	1950
EVAP MOTOR HP	1
COND CFM	2200
COND MOTOR HP	1
CONDENSATE REMOVAL	PUMP – 20' LIFT
REFRIGERANT CHARGE	80 oz R-410A
HEIGHT	51-3/4 in
WIDTH	27-1/2 in
DEPTH	39-1/2 in
NET WEIGHT	485 lb

### SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air  
95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers  
are recommended
- OA EER is determined at high fan speed, with condenser  
discharge air ducted into separate area
- OA CFM with free discharge
- OA Amps & Watts at 208 Volts

**COOLING AMBIENT** OPERATING RANGE 65° TO 105°

**NOT APPROVED FOR OUTDOOR USE**



**AIR COOLED**




*Cooling done Right!*  
**OCEANAIRE**


OCEANAIRE-INC.COM  
OA-TS-20AC6032-02112021

## PRODUCT FEATURES


- OA SOLID STATE ELECTRONIC CONTROLLER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA CONDENSATE OVERFLOW ALERT
- OA HIGH PRESSURE SAFETY SWITCH
- OA THREE PHASE MONITOR
- OA WASHABLE ELECTROSTATIC AIR FILTERS

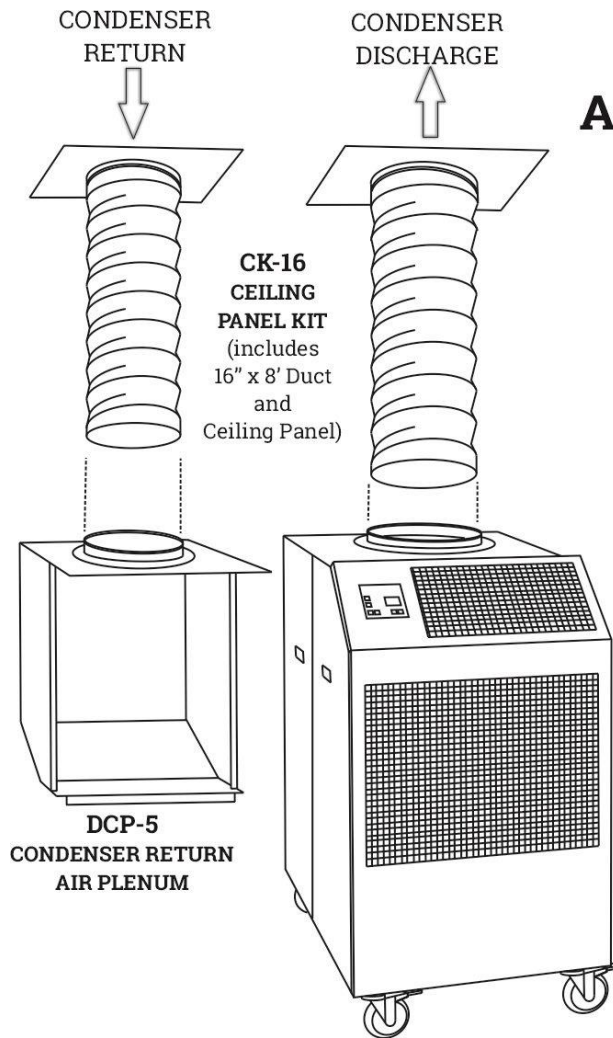


## Optional ACCESSORIES



**2NK-3 (2 X 8'')**  
**NOZZLE KIT**  
for Directional  
Cooling/Heating



**2DDA-16**  
**DISCHARGE**  
**DUCT ADAPTER**  
for Extended  
Single Duct Length

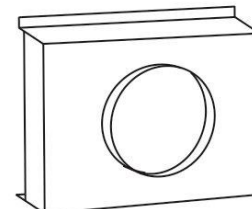

**DEP-16**  
**EVAPORATOR RETURN**  
**AIR PLENUM**