# OCEANAIRE

## MODEL: 2OACH1811

**1.5 TON DELUXE PORTABLE HEAT PUMP**

### TECHNICAL SPECIFICATIONS

| | |
|---|---|
| **COOLING CAPACITY** | **16,800 BTUH** |
| **HEATING CAPACITY** | **15,000 BTUH** |
| VOLTAGE | 115V, 60Hz, 1PH |
| AMPS | 14.1 |
| TOTAL WATTS | 1670 |
| IN RUSH AMPS | 75 |
| PLUG TYPE | 5-20P, LCDI |
| EER | 10.0 |
| COMPRESSOR | ROTARY |
| COMPRESSOR HP | 1-1/2 |
| COMPRESSOR LRA | 63 |
| EVAP CFM - HIGH | 600 |
| EVAP MOTOR HP | 1/8 |
| COND CFM | 930 |
| COND MOTOR HP | 1/8 |
| CONDENSATE TANK (Pump Optional) | 5 GALLON |
| REFRIGERANT CHARGE | 40 oz R-410A |
| HEIGHT | 45-3/4 in |
| WIDTH | 24 in |
| DEPTH | 30 in |
| NET WEIGHT | 260 lb |

HEATING & COOLING

**SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE**

- **Cooling Capacity** is total BTUH at 80ºDB/67ºWB return air 95ºF Outdoor at high fan speed
- **Heating Capacity** is total BTUH at 70ºDB/60ºWB indoor, 47ºDB/43ºWB Outdoor
- Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- EER is determined at high fan speed, with condenser discharge air ducted into separate area
- CFM with free discharge
- Amps & Watts at 115 Volts

**COOLING AMBIENT** **OPERATING RANGE 65º TO 105º**
**HEATING AMBIENT** **OPERATING RANGE 40º TO 85º**
**NOT APPROVED FOR OUTDOOR USE**

C UL US

MADE IN THE UNITED STATES OF AMERICA

*Cooling and Heating done Right!*

OCEANAIRE

OCEANAIRE-INC.COM
OA-TS-2OACH1811-02112021

# OCEANAIRE

## MODEL: 2OACH1811

**1.5 TON DELUXE PORTABLE HEAT PUMP**

### PRODUCT FEATURES

- SOLID STATE ELECTRONIC CONTROLLER
- AUTOMATIC MODE CHANGEOVER
- MANUAL OR AUTO 6-SPEED FAN CONTROL
- LARGE LED DISPLAY
- SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- CONDENSATE OVERFLOW ALERT
- HIGH PRESSURE SAFETY SWITCH
- WASHABLE ELECTROSTATIC AIR FILTERS

MADE IN THE UNITED STATES OF AMERICA

## Optional ACCESSORIES

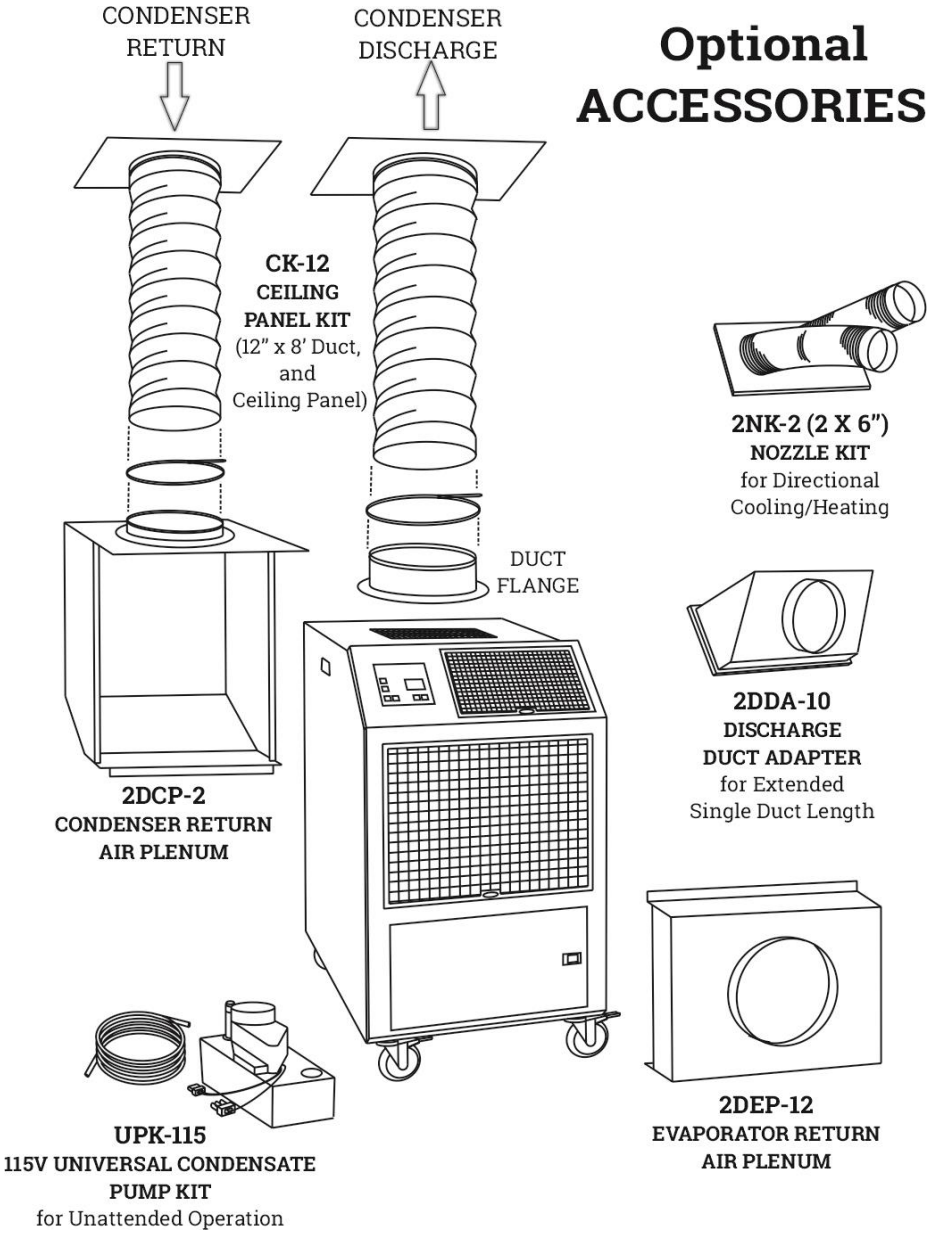


*Cooling and Heating done Right!*

OCEANAIRE

OCEANAIRE-INC.COM

OA-TS-2OACH1811-02112021