

OCEANAIRE

MODEL: PAC1811
1.5 TON PORTABLE SPOT COOLER

TECHNICAL SPECIFICATIONS

COOLING CAPACITY	16,800 BTUH
VOLTAGE	115V, 60Hz, 1PH
AMPS	14.1
TOTAL WATTS	1670
IN RUSH AMPS	75
PLUG TYPE	5-20P, LCDI
EER	10.0
COMPRESSOR	ROTARY
COMPRESSOR HP	1-1/2
COMPRESSOR LRA	63
EVAP CFM - HIGH	600
EVAP MOTOR HP	1/8
COND CFM	930
COND MOTOR HP	1/8
CONDENSATE TANK (Pump Optional)	5 GALLON
REFRIGERANT CHARGE	40 oz R-410A
HEIGHT	45-3/4 in
WIDTH	24 in
DEPTH	30 in
NET WEIGHT	260 lb



AIR COOLED



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into separate area
- OA CFM with free discharge
- OA Amps & Watts at 115 Volts

COOLING AMBIENT **OPERATING RANGE 65° TO 105°**

NOT APPROVED FOR OUTDOOR USE



Cooling done Right!
OCEANAIRE

OCEANAIRE-INC.COM
OA-TS-PAC1811-02112021

OCEANAIRE


MODEL: PAC1811
1.5 TON PORTABLE SPOT COOLER

PRODUCT FEATURES

- OA 24V CONTROL CIRCUIT WITH NON-PROGRAMMABLE ELECTRONIC THERMOSTAT
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA 2-SPEED FAN SWITCH
- OA CONDENSATE OVERFLOW ALERT LIGHT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTERS



Optional ACCESSORIES

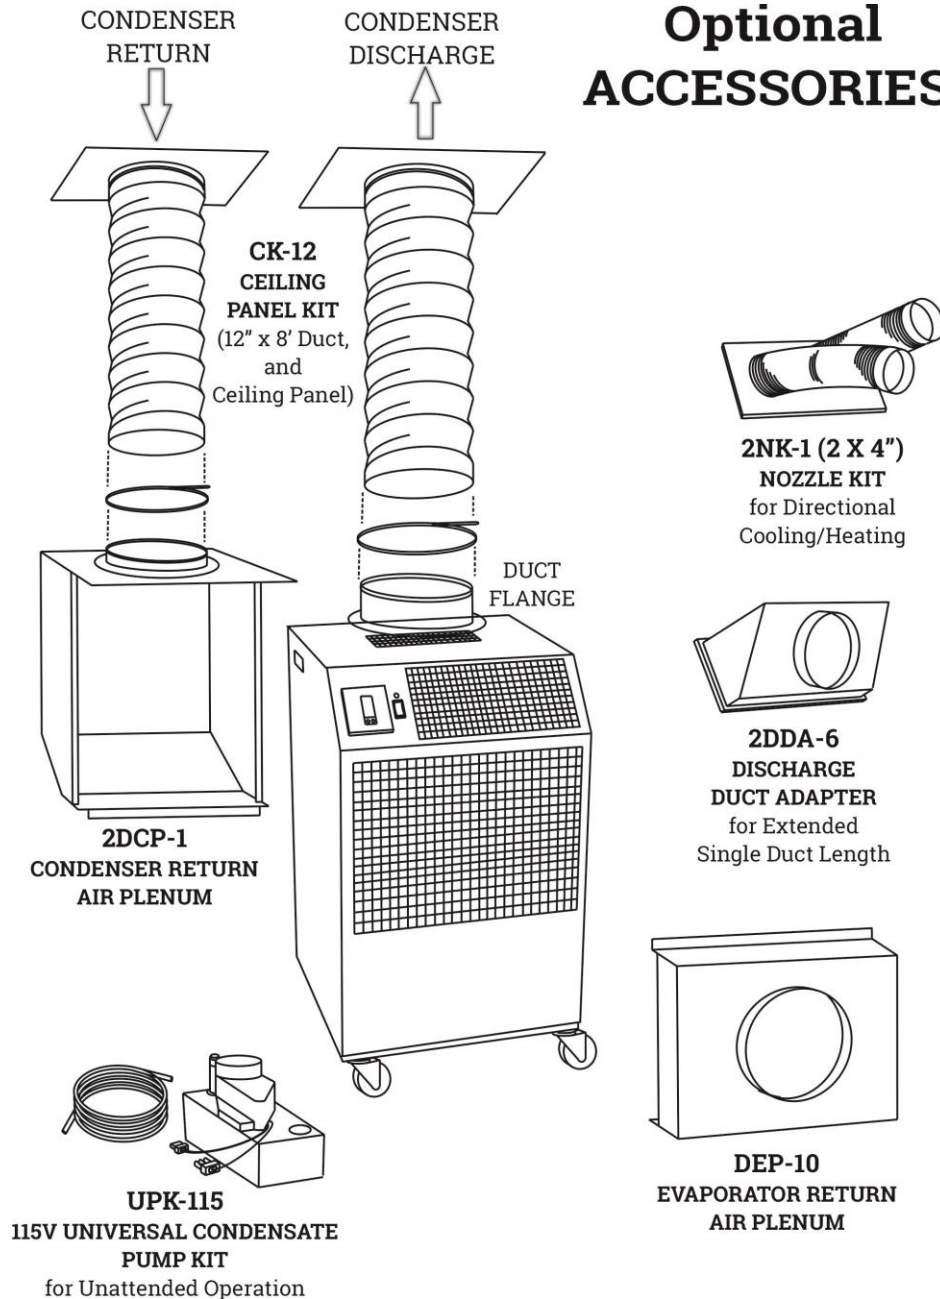

Cooling done Right!
OCEANAIRE

OCEANAIRE-INC.COM
OA-TS-PAC1811-02112021