

# OCEANAIRE

**MODEL: 2OAC3634**  
**3 TON DELUXE PORTABLE**  
**AIR CONDITIONER**

## TECHNICAL SPECIFICATIONS

**COOLING CAPACITY 36,050 BTUH**

VOLTAGE	460V, 60Hz, 3PH
AMPS	8.7
TOTAL WATTS	3620
IN RUSH AMPS	60
PLUG TYPE	L16-20P
EER	10.0
COMPRESSOR	Scroll
COMPRESSOR HP	3
COMPRESSOR LRA	35
EVAP CFM - HIGH	1200
EVAP MOTOR HP	1/3
COND CFM	1390
COND MOTOR HP	1
CONDENSATE TANK (Pump Optional)	5 GALLON
REFRIGERANT CHARGE	66 oz R-410A
HEIGHT	50-1/4 in
WIDTH	27-1/2 in
DEPTH	35 in
NET WEIGHT	400 lbs



**AIR COOLED**



### SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- ⓘ **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- ⓘ Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- ⓘ EER is determined at high fan speed, with condenser discharge air ducted into separate area
- ⓘ CFM with free discharge
- ⓘ Amps & Watts at 460 Volts

**COOLING AMBIENT OPERATING RANGE 65° TO 105°**

**NOT APPROVED FOR OUTDOOR USE**



*Cooling done Right!*

# OCEANAIRE


OCEANAIRE-INC.COM  
OA-TS-2OAC3634-03012020

# OCEANAIRE

**MODEL: 20AC3634**  
**3 TON DELUXE PORTABLE**  
**AIR CONDITIONER**

## PRODUCT FEATURES

- OA SOLID STATE ELECTRONIC CONTROLLER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA CONDENSATE OVERFLOW ALERT
- OA HIGH PRESSURE SAFETY SWITCH
- OA THREE PHASE MONITOR
- OA WASHABLE ELECTROSTATIC AIR FILTERS

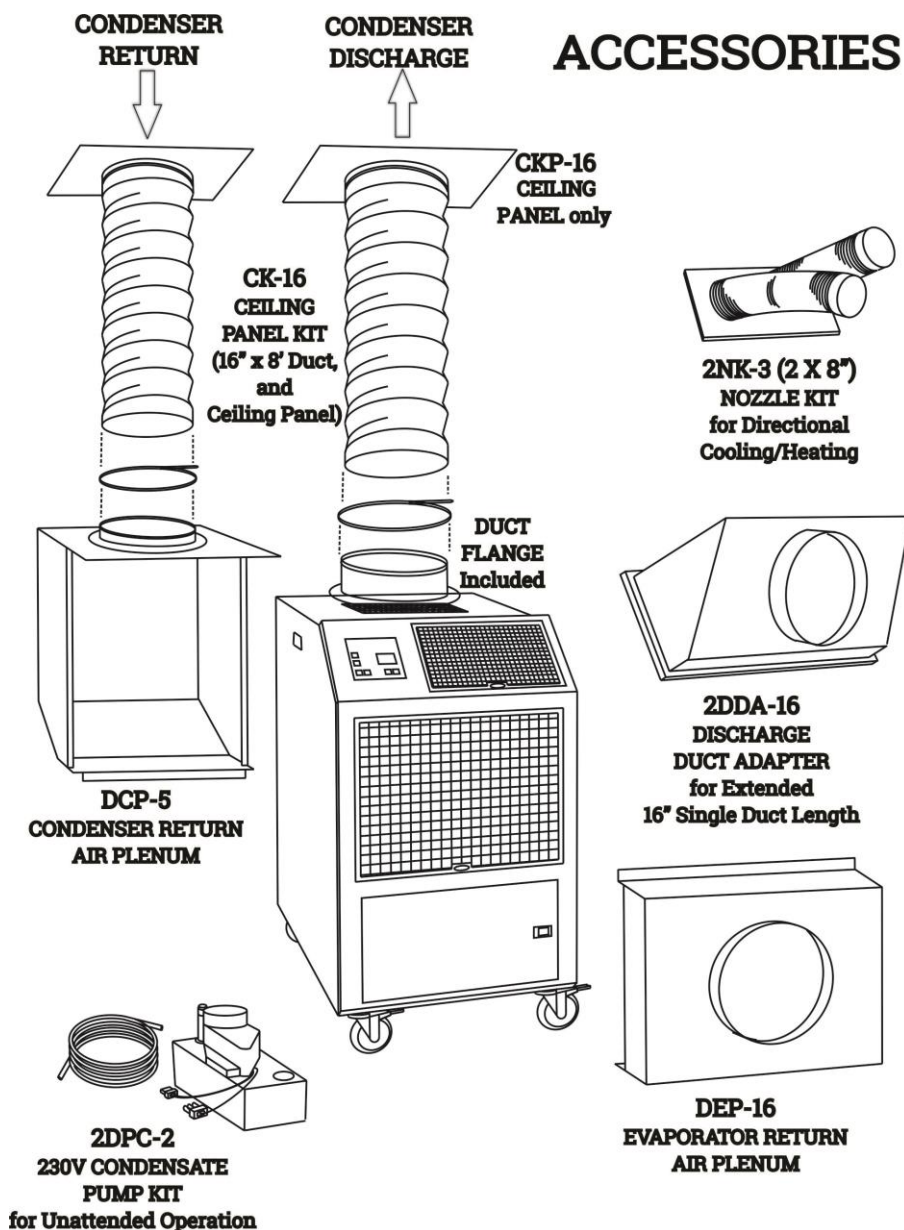

# OCEANAIRE

OCEANAIRE-INC.COM  
OA-TS-20AC3634-03012020