

OCEANAIRE

MODEL: OWC3634
3 TON DELUXE PORTABLE
WATER COOLED AIR CONDITIONER

TECHNICAL SPECIFICATIONS

COOLING CAPACITY	36,100 BTUH
VOLTAGE	460V, 60Hz, 3PH
AMPS	4.7
TOTAL WATTS	2700
IN RUSH AMPS	48
PLUG TYPE	L16-20P
EER	13.4
COMPRESSOR	SCROLL
COMPRESSOR HP	3
COMPRESSOR LRA	35
EVAP CFM - HIGH	1200
EVAP MOTOR HP	1/3
COND WATER FLOW (GPM)	
AT 60°F INLET	2.2
AT 85°F INLET	9
WATER VALVE CONNECTION (INLET)	5/8 MF
WATER RETURN CONNECTION	5/8 MF
CONDENSATE REMOVAL	PUMP AUTOMATIC
20' VERTICAL LIFT	3/8 MF
REFRIGERANT CHARGE	24 oz R-410A
HEIGHT	50-1/4 in
WIDTH	45 in
DEPTH	28-1/4 in
NET WEIGHT	310 lb



WATER COOLED



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- ⓘ **Cooling Capacity** is total BTUH at 80°DB/67°WB return air with 85°EWT and 105°LWT
- ⓘ Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- ⓘ EER is determined at high fan speed
- ⓘ CFM with free discharge
- ⓘ Amps & Watts at 460 Volts

COOLING AMBIENT **OPERATING RANGE 65° TO 105°**
NOT APPROVED FOR OUTDOOR USE



Cooling done Right!
OCEANAIRE


OCEANAIRE-INC.COM
OA-TS-OWC3634-03012020

OCEANAIRE

MODEL: OWC3634
3 TON DELUXE PORTABLE
WATER COOLED AIR CONDITIONER

PRODUCT FEATURES

- OA SOLID STATE ELECTRONIC CONTROLLER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA INTERNAL CONDENSATE PUMP WITH OVERFLOW ALERT
- OA WATER REGULATING VALVE
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTER
- OA THREE PHASE MONITOR

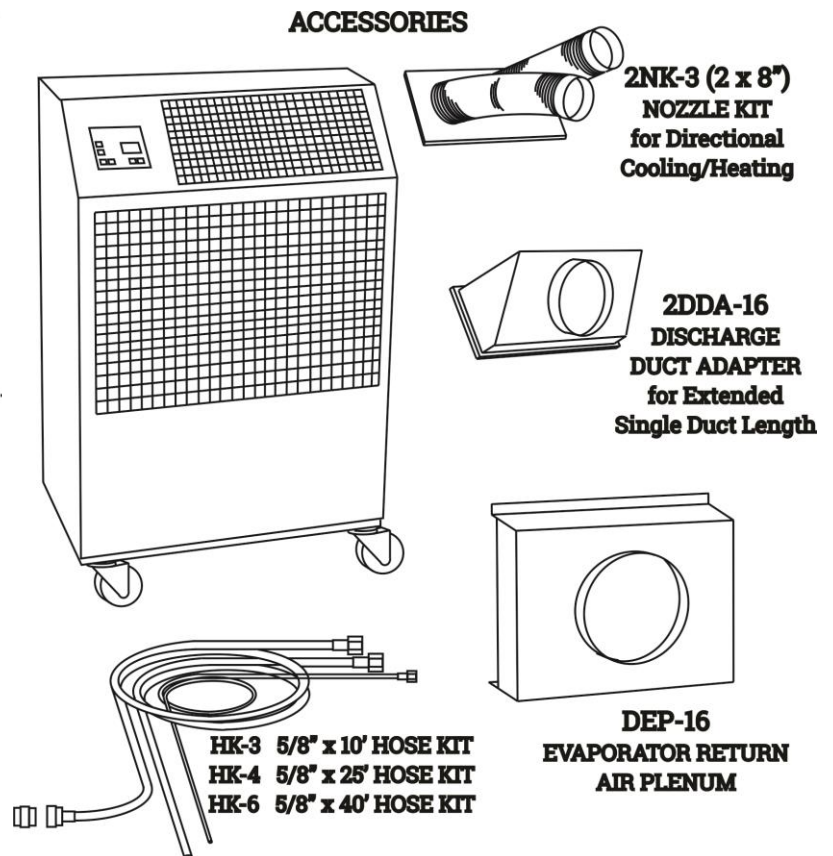

Cooling done Right!

OCEANAIRE

OCEANAIRE-INC.COM
OA-TS-OWC3634-03012020