

MODEL: CAC1211
1 TON SPOT COOLER "COOL CUBE"

### TECHNICAL SPECIFICATIONS

COOLING CAPACITY 12,000 BTUH

VOLTAGE 115V, 60Hz, 1PH

AMPS 12 TOTAL WATTS 1180

IN RUSH AMPS 63

PLUG TYPE 5-15P LCDI

EER 10.0

COMPRESSOR ROTARY

COMPRESSOR HP 1 COMPRESSOR LRA 50

EVAP CFM – HIGH/LOW 400/320 EVAP MOTOR HP 1/8

COND CFM 490

COND MOTOR HP 1/8

CONDENSATE TANK 2 GALLON

REFRIGERANT CHARGE 18 oz R-410A HEIGHT 24-1/2 in WIDTH 17-1/4 in DEPTH 24 in

NET WEIGHT 135 lbs





.... ROLL THEM
..... HANG THEM
...... STACK THEM
....... RACK THEM

### SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA Cooling Capacity is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into separate area
- OA CFM with free discharge
- OA Amps & Watts at 115 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°

NOT APPROVED FOR OUTDOOR USE







# **OCEANAIRE**


## MODEL: CAC1211 1 TON SPOT COOLER "COOL CUBE"

### PRODUCT FEATURES


- OA SOLID STATE ELECTRONIC CONTROLLER
- OA LARGE LED DISPLAY
- MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA CONDENSATE OVERFLOW ALERT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTER



### ACCESSORIES

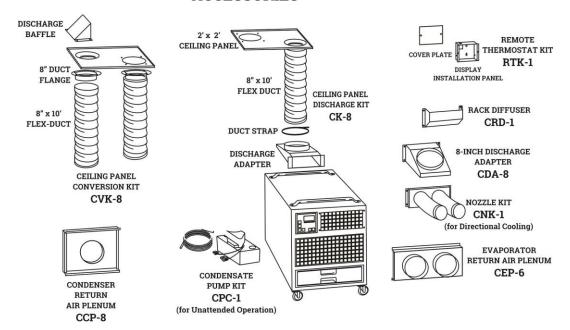

### **ENGINEERED SOLUTIONS**

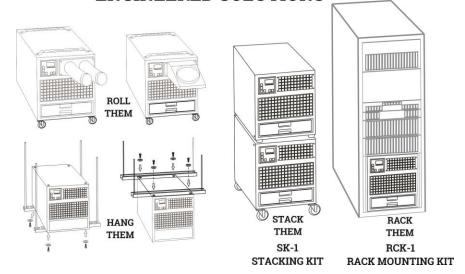

Cooling done Right!

OCEANAIRE

OCEANAIRE-INC.COM OA-TS-CAC1211-05012020