

# OCEANAIRE

**MODEL: 2OAC1211**  
**1 TON DELUXE PORTABLE**  
**AIR CONDITIONER**

## TECHNICAL SPECIFICATIONS

<b>COOLING CAPACITY</b>	<b>11,800 BTUH</b>
VOLTAGE	115V, 60Hz, 1PH
AMPS	10.4
TOTAL WATTS	1180
IN RUSH AMPS	60
PLUG TYPE	5-15P, LCDI
EER	10.0
COMPRESSOR	ROTARY
COMPRESSOR HP	1
COMPRESSOR LRA	50
EVAP CFM - HIGH	400
EVAP MOTOR HP	1/8
COND CFM	580
COND MOTOR HP	1/8
CONDENSATE TANK (Pump Optional)	5 GALLON
REFRIGERANT CHARGE	18 oz R-410A
HEIGHT	37-3/4 in
WIDTH	20 in
DEPTH	25 in
NET WEIGHT	180 lb



**AIR COOLED**



### SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- ⓘ **Cooling Capacity** is total BTUH at 80°DB/67°WB return air 95°F Outdoor at high fan speed
- ⓘ Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- ⓘ EER is determined at high fan speed, with condenser discharge air ducted into separate area
- ⓘ CFM with free discharge
- ⓘ Amps & Watts at 115 Volts

**COOLING AMBIENT    OPERATING RANGE 65° TO 105°**

**NOT APPROVED FOR OUTDOOR USE**



*Cooling done Right!*  
**OCEANAIRE**

OCEANAIRE-INC.COM  
OA-TS-2OAC1211-02112021

# OCEANAIRE


**MODEL: 2OAC1211**  
**1 TON DELUXE PORTABLE**  
**AIR CONDITIONER**

## PRODUCT FEATURES

- OA SOLID STATE ELECTRONIC CONTROLLER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA CONDENSATE OVERFLOW ALERT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTERS



## Optional ACCESSORIES

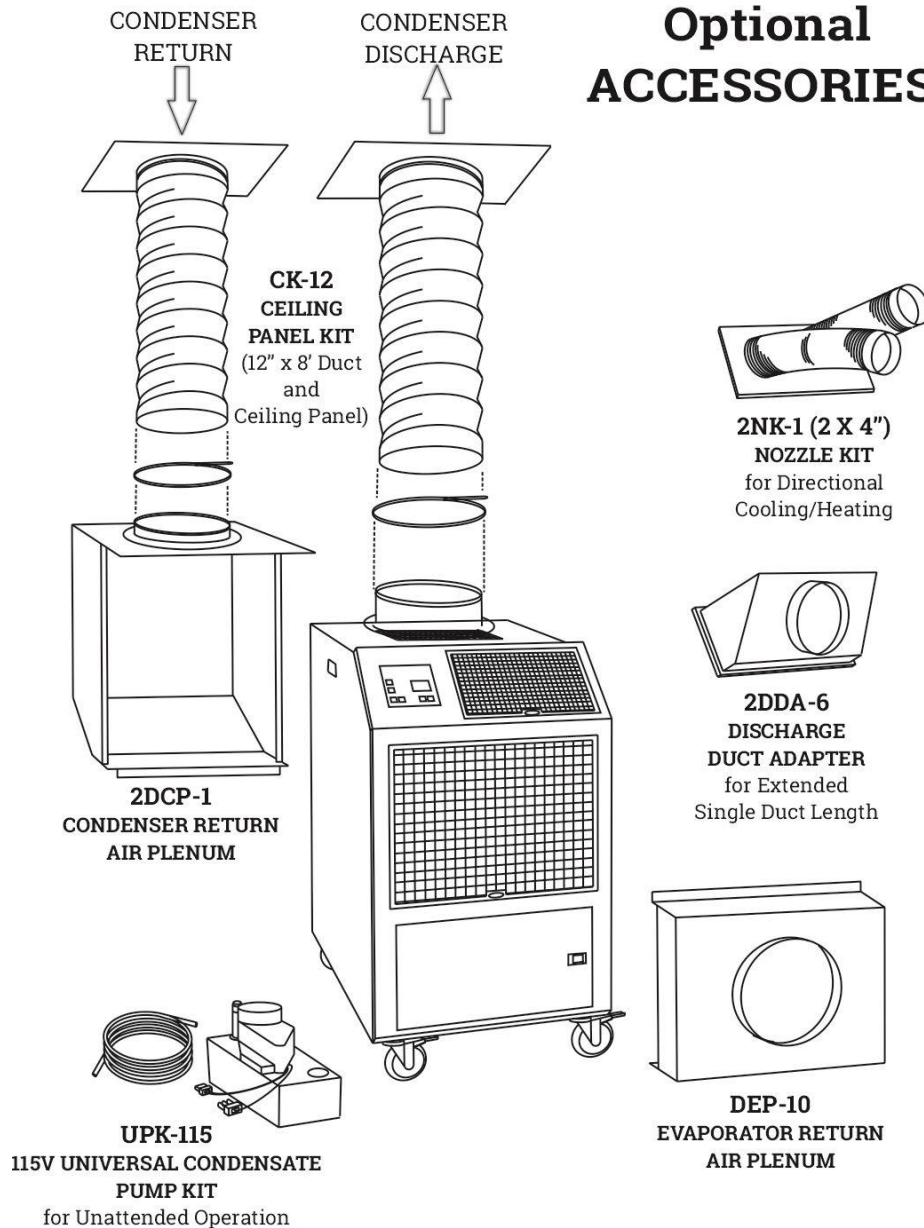

*Cooling done Right!*  
**OCEANAIRE**

OCEANAIRE-INC.COM  
OA-TS-2OAC1211-02112021